



# Dickey Manufacturing Company

## Assure Tight 35

Assure Tight Seals are versatile, easy to use, and are a fully adjustable plastic seal. The thin, smooth tail can fit through small openings. The seals can be locked at any length, unlike beaded tail seals. The tail is secured with metal locking mechanism for an assured secure seal.



### FEATURES

- ↔ Corrosion proof
- ↔ Enclosed metal locking mechanism
- ↔ Multi-locking positions
- ↔ No sealing tools needed
- ↔ Ultraviolet inhibitors and antioxidants added to extend life
- ↔ Stock seals available for rush shipments
- ↔ Stock seals are marked sequential numbering
- ↔ Recyclable
- ↔ Stock item available in red, blue, green, & yellow.
- ↔ 13 3/4" overall length

### APPLICATIONS

- ↔ Cabinets
- ↔ Cash & Coin bags
- ↔ Containers
- ↔ Fiber drums
- ↔ Truck & Railcar doors
- ↔ Liquid bulk trailers
- ↔ Liquor carts
- ↔ Transfer honners

### PACKAGING

- ↔ 1000 Seals per case
- ↔ Weight per 1000: 16 lbs


### SPECIFICATIONS

- ↔ Materials: Polypropylene
- ↔ Operational length: variable
- ↔ Minimum required slot size: ~.2"
- ↔ Average breaking strength: 95 lbs
- ↔ Numbering: to 7 digits
- ↔ Lettered SECURED
- ↔ Stock colors available: Yellow, red, and blue

### LOCKING INSTRUCTIONS

- ↔ Pass narrow end of seal through the openings of the item to be sealed
- ↔ Insert and push the end of the seal into and through the locking barrel
- ↔ Pull remainder of the seal through until the seal fits tightly on the item that you are sealing
- ↔ Gently tug on the seal to ensure the locking mechanism are properly seated
- ↔ Record seal number as required



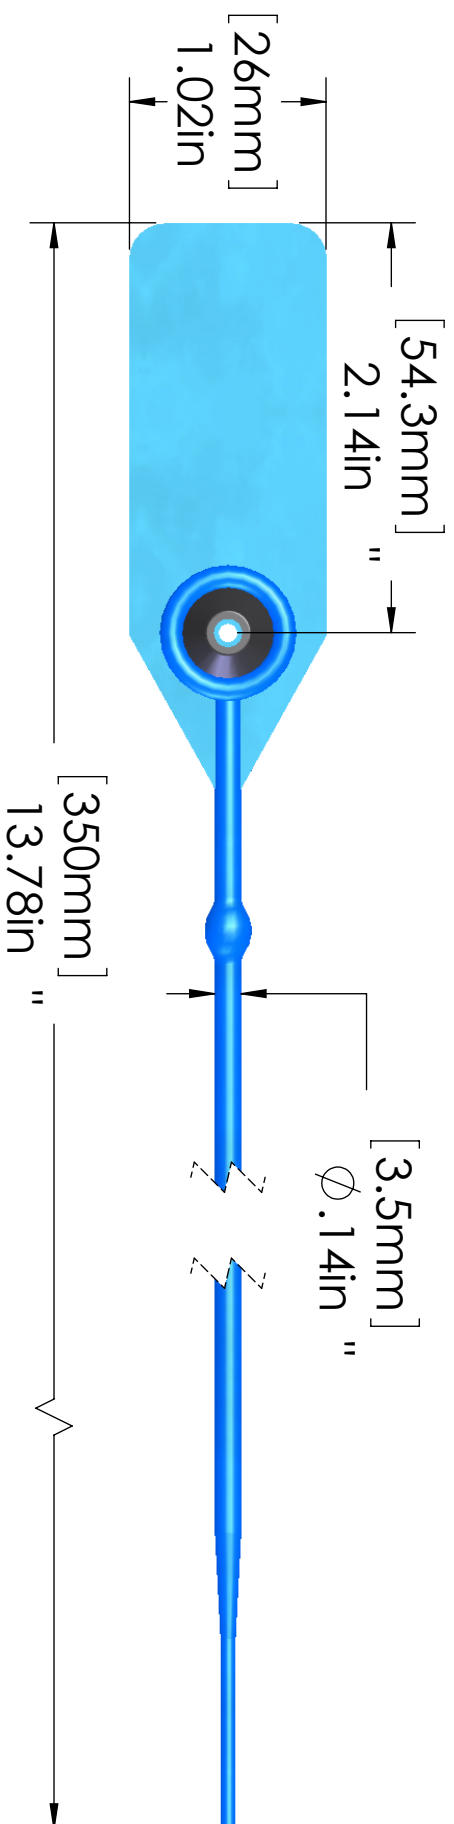

UNLESS OTHERWISE SPECIFIED

DESIRES	TOLERANCES	FRACTIONAL
XXX ±.015		±.02
XXX ±.010		ANGULAR
XXX ±.005		±.30°

BREAK ALL EDGES 0.1MM\*  
 ALL HOLES CHAMFERED 0.1MM\*  
 SURFACE FINISHNESS  
 125  $\mu$ M BEFORE PAINTING  
 THREADS  
 PROTECTION

THIS DRAWING AND THE INFORMATION ON IT ARE THE PROPERTY OF DICKEY MANUFACTURING COMPANY  
 AND IS NOT TO BE USED OR DUPLICATED WITHOUT PRIOR AUTHORIZATION

**DMC**  
 DICKEY MANUFACTURING COMPANY  
 1315 E. MAIN STREET ST. CHARLES, IL 60174 PHONE: (630) 584-2918 FAX: (630) 584-0281

MATERIAL: PP Copolymer  
 TREATMENT:  
 DRAWN:  
 CHECKED:

TITLE: Assure Tight 35

DATE: 4/15/2014	PLOT SCALE: 1:1	PLOT SIZE: PLOTSIZE	SHEET: 1 OF 1
DRAWER: 502900		DWG NO: 7985	

QFD7.37-3  
 Rev 1.1 7-6-05

5

4

3

2

1

1