




Dickey Manufacturing Company

MINI CABLE SEALS

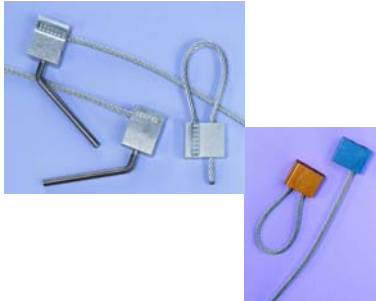

APPLICATIONS

- ↵ Freight containers
- ↵ Gates
- ↵ Railroad freight and tank cars
- ↵ Storage units
- ↵ Truck doors

PACKAGING

- ↵ Number of cable seals per box: 200
- ↵ Gross weight per box: 26 lbs.
- ↵ Box dimensions: 6 1/2" X 10" X 13"



SPECIFICATIONS

- ↵ Aluminum body with galvanized steel cable
- ↵ Body sizes: 1 1/16" X 1" X 3/8"
- ↵ Cable diameter: 1/8" or 5/32"
- ↵ 9" usable cable length; custom cable lengths are available
- ↵ Custom printing: 2 lines, 7 characters per line
- ↵ Numbering: 6 digits
- ↵ Pull rating: Average 1800lbs for 1/8" cable, 3000 lbs for 5/32" cable
- ↵ **5/32" required for C-TPAT (H) Compliance**

Mini cable seals are used on freight containers, storage units and truck doors. The adjustable loop diameter provides a wide application range and the flexibility to secure almost any type of container door.


FEATURES

- ↵ Solid, rust proof aluminum body
- ↵ Heavy duty galvanized steel cable provides durability and extra strength
- ↵ Flexible sealing capabilities: can seal uneven or bent locking mechanisms
- ↵ Positive locking with snap off key
- ↵ Loop diameter can be adjusted to any size
- ↵ Anodized colors are available
- ↵ Provides the ultimate anti-pilferage protection
- ↵ Recyclable
- ↵ Stock seals available for rush shipments stamped with the word "SECURED" and sequential numbering

LOCKING INSTRUCTIONS

- ↵ Place loose end of cable through opening of item to be sealed
- ↵ Insert end into opening in seal body and pull to desired loop length
- ↵ Screw threaded key into hole on the top of the seal body to anchor the cable in position
- ↵ Continue to turn handle until it snaps off, the head remains tightly recessed in the seal body securely locking the cable in place.
- ↵ Record seal number as required



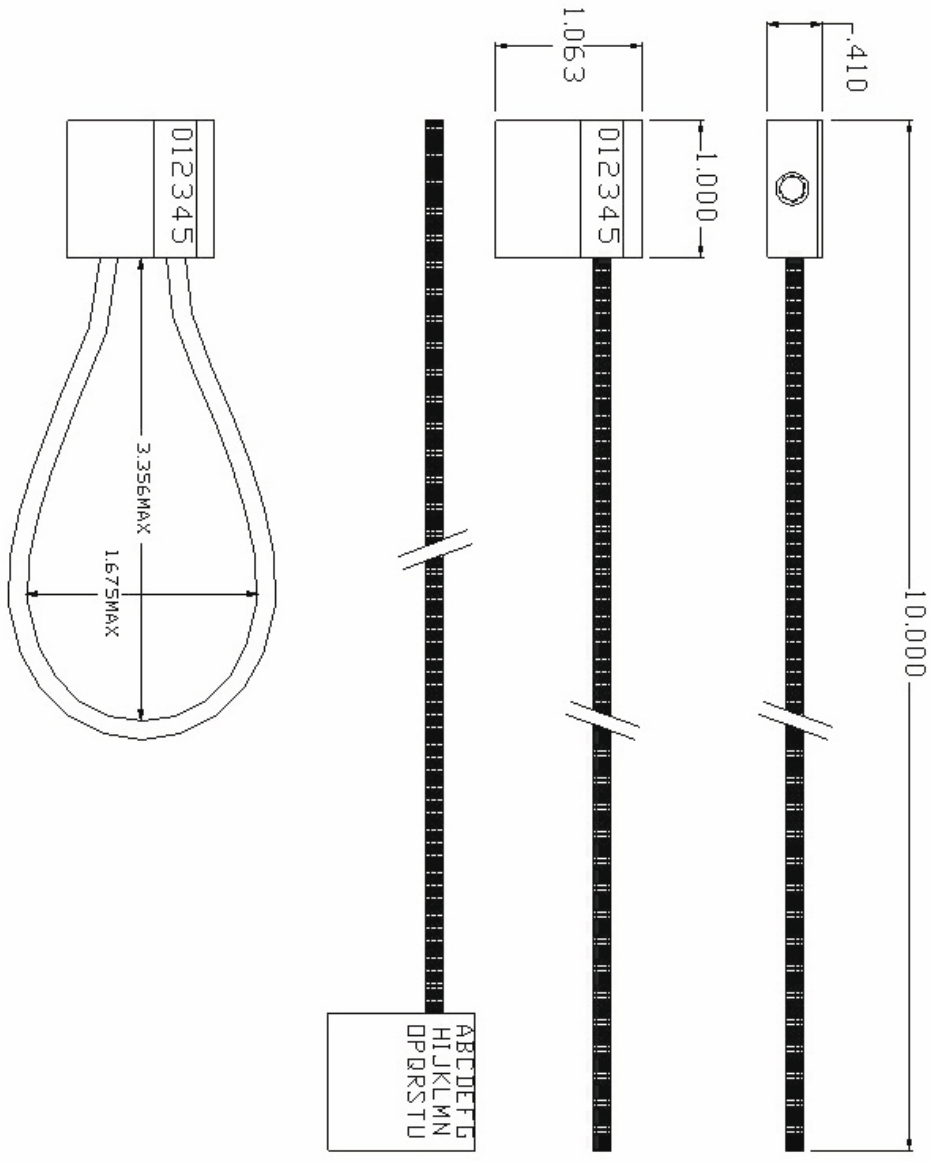

Mini Cable Seal