



Dickey Manufacturing Company

Worldwide Supplier of Security Seals Tamper-Evident Products & Cable Ties

Dickey Manufacturing Company (DMC) is dedicated to supplying high quality security seals, tamper-evident products and cable ties while maintaining competitive pricing. We maintain an elevated level of customer service, a first class delivery service, and continued product development. Dickey Manufacturing Company is certified in the ISO 9001:2015 quality standard.

Dickey Manufacturing Company was established in 1911, and is located in Saint Charles, Illinois near the city of Chicago. Our location provides us excellent access to materials, top freight services and air couriers.

The Dickey Manufacturing Company Advantage

The customer service team will work with you and help find a solution that fulfills your security requirements.

DMC stocks a large variety of products, which are available for same day shipping service. Not only is the capability to ship on demand available but complete national and international routing is available via ground, air or ocean freight services. Our Shipping Department has arranged, through freight carriers, some of the best pricing available to assist you in your transportation needs. DMC is an authorized, on site, Federal Express shipper. Access to most major express shipping services are also available, as well as the United States Postal Service which is often required for military APO addresses.















Dickey Manufacturing Company's 50,000+ sqft manufacturing facility employs 40-45 employees committed to offering high quality seals, ranging from indicative to high security levels. DMC specializes in anti-pilferage seals, high security kingpin locks, and ISO/PAS 17712& Customs compliant seals.

DMC is also an exclusive US supplier of ACME Security Seal. ACME Seals has an employee base of over 200 at the Puchong MY location in addition to the UK facility.




Dickey Manufacturing Company

APPLICATION ICONS

	Trucks		Rail Cars
	Hopper Rail Cars		Cargo Containers
	Rail & Truck Tankers		Packaging & Courier
	Drums & Barrels		Utility Meters
	Fire & Safety		Luggage & Totes
	Airlines		Cash Bags & ATM Cassettes
	Game Tags		Forestry & Nursery
	Medical		

ASTM Strength Rating



ISO/PAS 17712
Compliant Seals Available



Dickey Manufacturing Company

TRANSPORTATION SEALS



Dickey Mfg. Co. offers several types of transportation seals including: the Globe ball-type seal, the flat metal Premier seal, a flexible Plastic Truck Seal, high security Bolt Seals, and several other transportation seals.

The Globe and Premier seals are made of tinplate steel which offers high strength and high value in an indicative security seal. The Plastic Truck Seal is constructed of injection molded plastic and is available in 6 highly visible colors. The high security bolt seals are made of high strength steel with a rust resistant finish and coated with shock resistant plastic. Indicative to high security, DMC has a seal for your security requirement.

All transportation seals are available in stock versions for immediate shipments.



Dickey Manufacturing Company

BOLT SEALS



Bolt seals are high-strength security seals used on shipping containers, railroad and air freight containers. The solid metal core head and a locking cylinder that is encased in shock proof plastic makes for a high level security seal and an efficient tamper deterrent.

ISO/PAS 17712 & C-TPAT Compliant

FEATURES

- ✦ The solid metal core head makes it impossible to knock seal through latch hardware
- ✦ Must be removed with bolt cutters
- ✦ Extremely economical, high level security at an affordable price
- ✦ High security laser engraving

PACKAGING

- ✦ 200 per carton (std)
- ✦ Gross weight: 35 lbs. (std)
- ✦ 200 per carton (SnapLock)
- ✦ Gross weight: 35 lbs. (SnapLock)

APPLICATIONS

- ✦ Cargo container doors
- ✦ Rail car doors
- ✦ Railroad and air freight containers
- ✦ Ship containers



LOCKING INSTRUCTIONS




- ✦ Insert pin through door catch
- ✦ Push numbered locking cylinder over end of pin until click is heard
- ✦ Click indicates that locking ring is activated
- ✦ Pull on cylinder to ensure seal is locked properly
- ✦ Record seal number as required




SPECIFICATIONS

- ✦ Shock resistant plastic cylinders available in blue, green, red, yellow, or white (white also available with a bar-coded number sequence) SnapLock stocked in red, yellow, green, orange, & blue
- ✦ Materials – carbon steel with zinc finish / shock resistant plastic
- ✦ Stock seals available for immediate shipments pre-numbered with a 7 digit consecutive number
- ✦ Company name stamped up to 6 characters
- ✦ Pull strength: 3,000+ lbs.



Bolt Seal

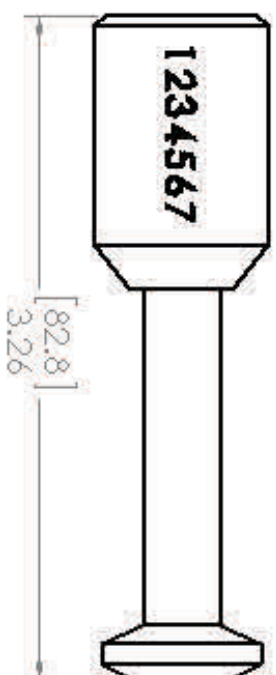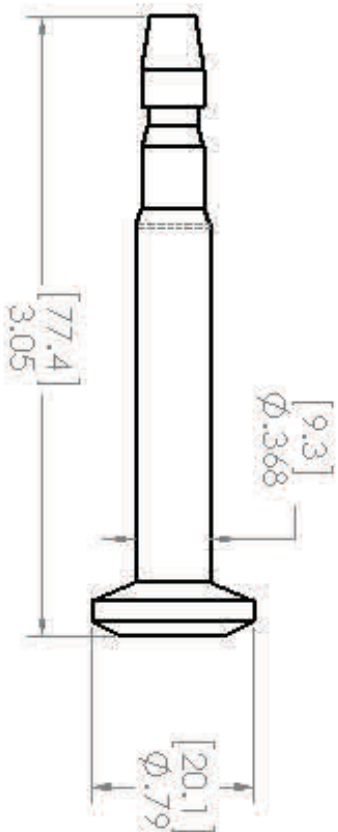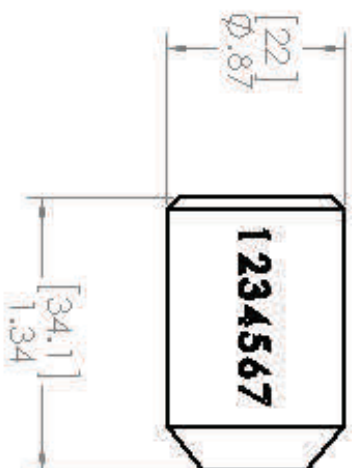

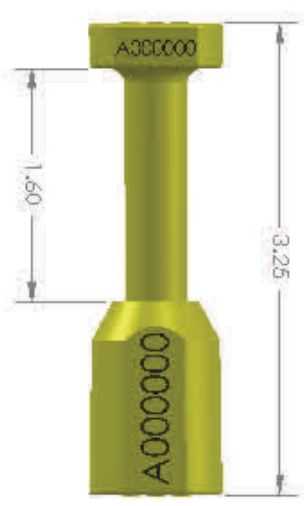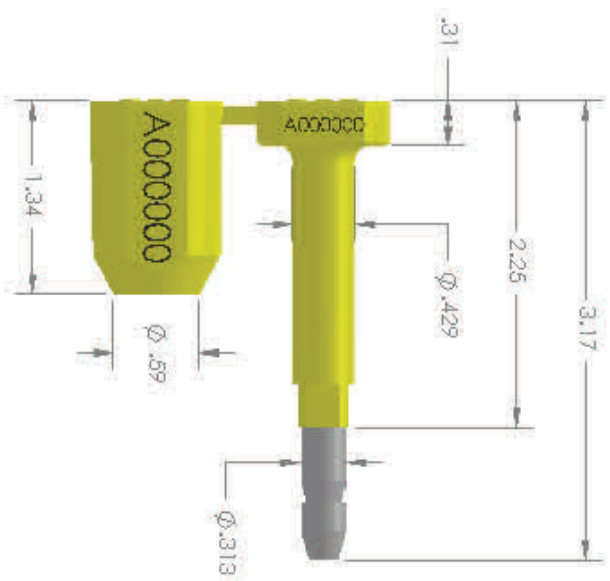


SnapLock



Dickey Manufacturing Company

GLOBE SEAL

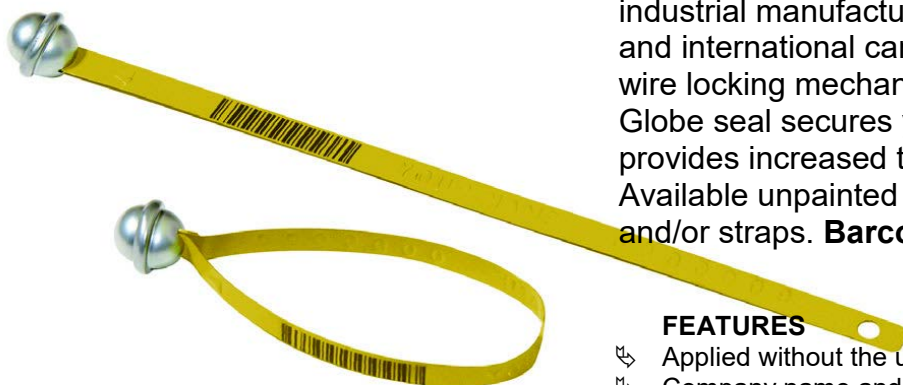

Globe seals are U.S. Customs approved and are used by many government agencies, industrial manufacturers, forwarding agents and international cargo handlers. The double wire locking mechanism encased within the Globe seal secures your shipment and provides increased tamper resistance. Available unpainted or with painted heads and/or straps. **Barcoding options available.**

APPLICATIONS

- Game/Fur Tags
- Ocean Containers
- Part ID Tags
- Railroad Freight & Tank Cars
- Sprinkler Systems
- Storage Bins
- Tractor Trailers
- Transfer Hoppers

PACKAGING

- 100 seals per wired bundle
- Up to 5000 per box
- Box dimensions: 18" X 11" X 22" (5M)
- Gross weight: 14 lbs per 1,000

SPECIFICATIONS

- Made of tin plate steel 95#, finished dimension: 5/16" X 8 1/2"
- Operational strap length: 7 1/4"
- Breaking strength: average 155 lbs.
- Embossing up to 18 characters and/or a 7 digit number sequence
- Company logos available (one time fee applies)
- Painted finish for both head and strap are available
- Custom color or paint designs available
- Barcoding options available**
- NSN#5340-00-081-3381


FEATURES

- Applied without the use of tools
- Company name and serial number embossed at no extra charge
- Painted finish available for added seal life & quick identification
- Stock seals are available for rush shipments
- Stock seals are embossed with the word "SECURED" and sequential numbering
- Recyclable
- Fits through extremely thin slots
- Cannot be disengaged by intrusion or manipulation and unlike plastic there is no risk of piercing with pins to interfere with the locking mechanism
- New & Improved head design for increased tamper resistance

LOCKING INSTRUCTIONS

- Insert tail fully into head
- Then pull back on tail to check proper sealing
- Record seal number as required (carefully cut with metal shears to remove)



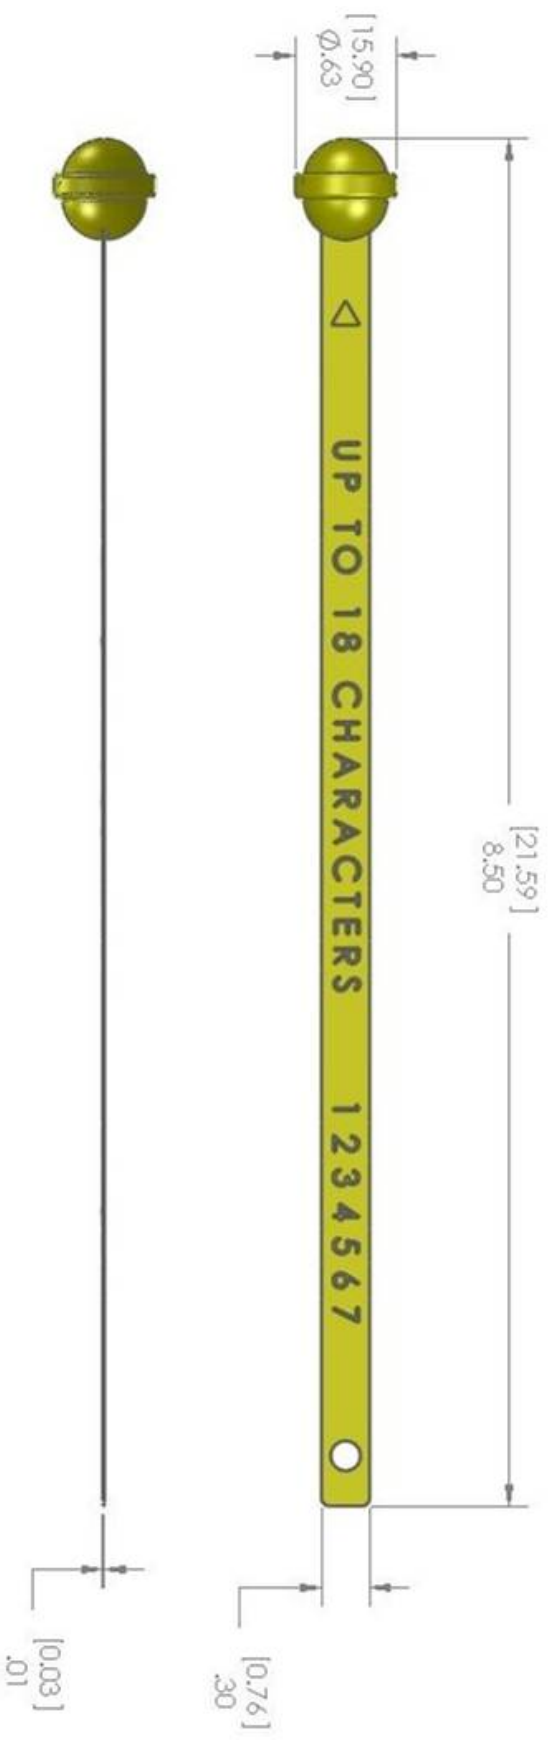

Globe Seal



Dickey Manufacturing Company

PREMIER SEALS



APPLICATIONS

- ↗ Fire Extinguishers
- ↗ Game/Fur Tags
- ↗ Ocean Containers
- ↗ Part ID Tags
- ↗ Railroad Freight & Tank Cars
- ↗ Sprinkler Systems
- ↗ Storage Bins
- ↗ Tractor Trailers
- ↗ Transfer Hoppers

PACKAGING

- ↗ 100 seals per wired bundle
- ↗ 5,000 seals per box
- ↗ Box dimensions: 10" X 10" X 22"
- ↗ Gross weight 13 lbs per 1,000

SPECIFICATIONS

- ↗ Made of tin plate steel 95#, finished dimension: 5/16" X 8 3/4"
- ↗ Operational strap length: 7 1/4"
- ↗ Breaking strength: 90 lbs.
- ↗ Embossing up to 16 characters and/or a 7 digit number
- ↗ Company logos available (one time fee applies)
- ↗ Painted finish available in green, yellow, orange, blue, purple, and red
- ↗ Custom colors or paint designs available
- ↗ NSN#5340-00-662-9817

Premier seals are the most economical transportation seal in the security industry. Suitable for various applications, the Premier seal offers a great combination of tamper protection and value.


FEATURES

- ↗ Applied without the use of tools
- ↗ Company name and serial number embossed at no additional charge
- ↗ Baked paint finish available for added seal life and quick identification
- ↗ Stock seals are available for rush shipments
- ↗ Stock seals embossed with the word "SECURED" and sequential numbering
- ↗ Recyclable
- ↗ Fits through extremely thin slots
- ↗ Cannot be disengaged by intrusion or manipulation and unlike plastic seals there is no risk of piercing with pins to interfere with the mechanism

LOCKING INSTRUCTIONS

- ↗ Insert shackle into head
- ↗ Then pull out firmly until hole in shackle shows
- ↗ Record seal number as required (carefully cut with metal shears to remove)



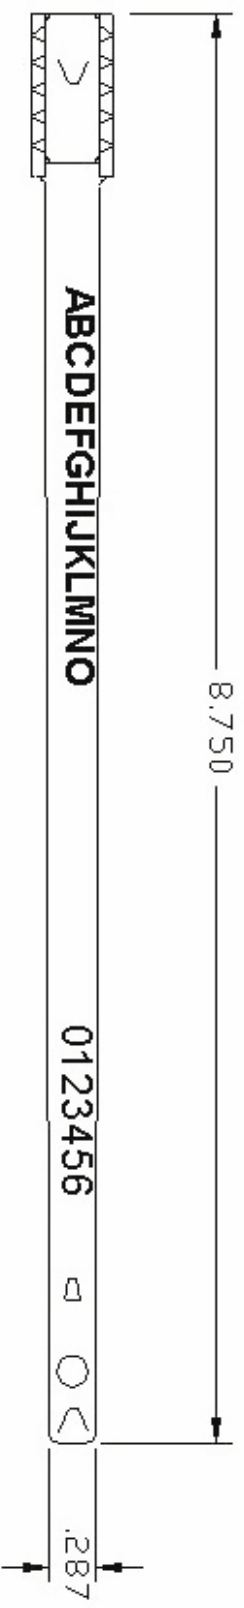


Premier Seal



Dickey Manufacturing Company

BULLDOG GEN 2 SEAL

The Bulldog Gen2 Seal has all of the same features as the original Bulldog Seal but unlike the original this product has an updated design with an easy tear off between each seal so there are no scrap pieces of plastic. The seal is fixed length and manufactured from two dissimilar materials. The Acetyl insert is durable and will withstand freezing and boiling conditions, while the polypropylene body is flexible for easy use. The design includes rolled heat staking technology to secure the insert to the body which provides clear evidence of tampering if forced open or cut. There is a designated break off point for easy removal and simple tamper inspection. This seal is ideal for securing vehicle doors and fire doors but is also suitable for other sealing requirements.

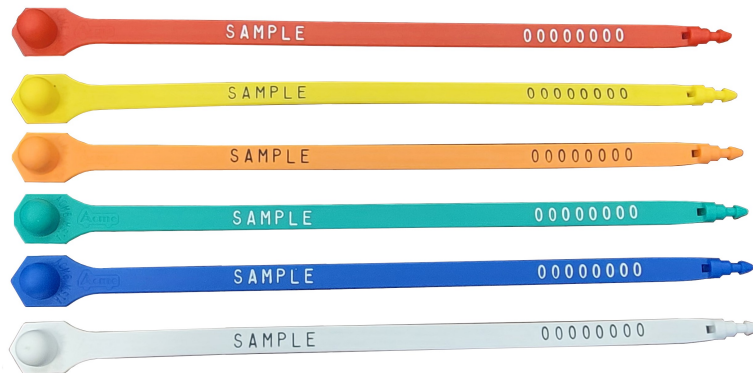

Recommended Applications:

Airlines, Cargo Trailers, Containers, Rail freight, Refineries, Vehicles, Fire doors, Lockers, Grain hoppers, and Game tags.

Materials:


Body: Polypropylene with UV & Biodegradable additives

Insert: Acetyl with Biodegradable additives.

Operating Lengths: 19cm (overall 21cm)

Strap Width: 7mm

Average Breaking Strength: 20kg

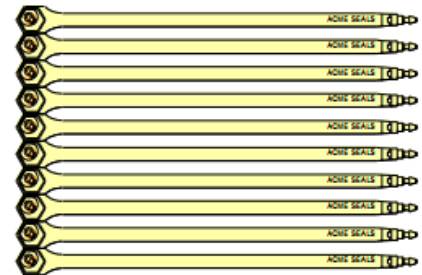

Marking:




Laser or Foil marking: Stock marked SECURED & Consecutively numbered

Optional custom marked with customer name and serial numbers

Colors: Red, blue, green, yellow, orange, black, white.

Packaging: 10/mat, 1000/box



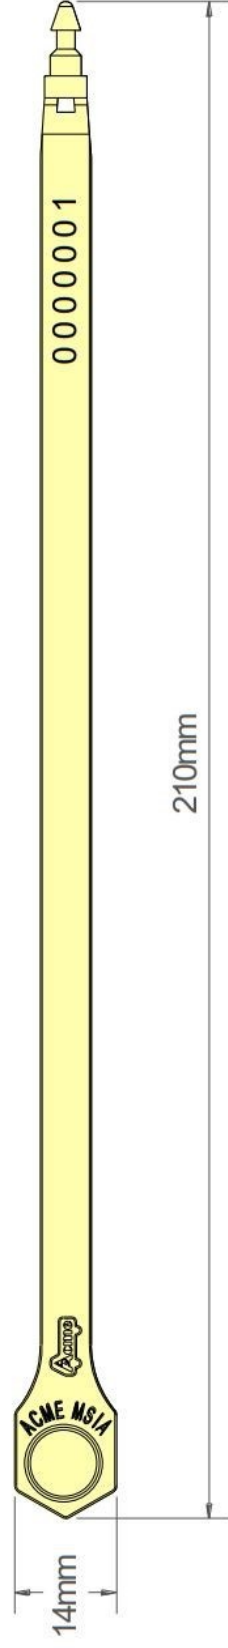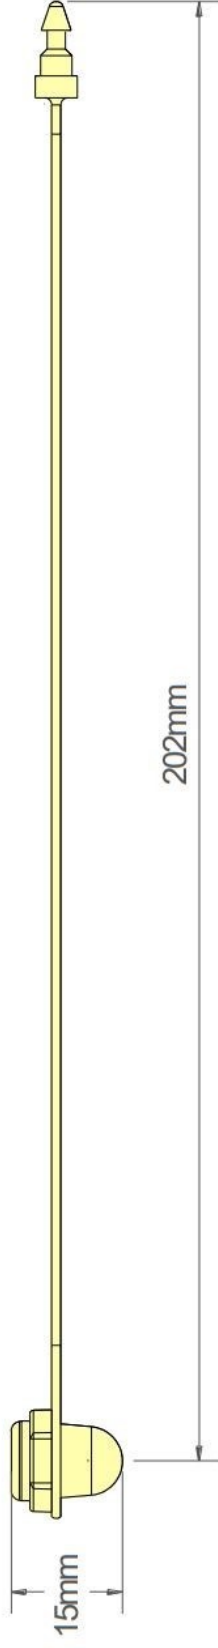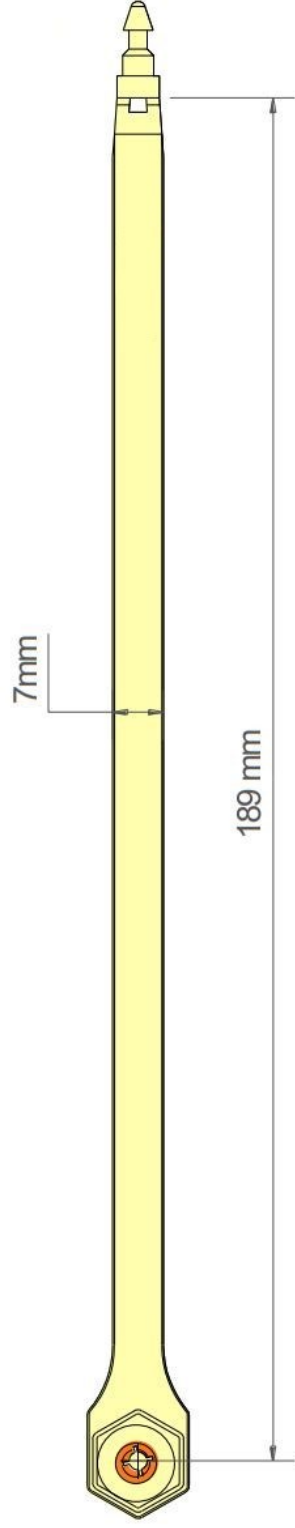



Dickey Manufacturing Company

Pitbull Plastic Truck Seal

The Pitbull seal represents the next generation in the plastic truck security seal line. The unique design added additional printing surface area for text, serial numbering, logos, and barcoding without adding additional length to the seal. The Pitbull can have all the information you require yet still maintain the standard truck seal length.

The Pitbull comes standard with UV inhibitors so the seals last longer. The seals remain flexible, will not crack and colors won't fade which makes the Pitbull ideal for applications that need extra seal life or are exposed to an outdoor environment.

The use of dissimilar plastic materials in the construction of the Pitbull makes the seal extremely resistant to freezing and boiling conditions that can cause other seals to fail or allow tampering.

The Pitbull is also the first seal to be offered by DMC that will have the option of being manufactured in a biodegradable material. The **GREEN Pitbull** is made with a special additive that will allow the plastic materials to breakdown and biodegrade once the material comes in contact with an environment where microbes are present—such as landfills, composting facilities, or soil. Biodegradation will be tested and verified under the ASTM 5511 standard for anaerobic biodegradation prevalent in landfill environments.

PACKAGING

- 10 seals per mat
- 1000 Seals per case
- Box: 12" x 10" x 9"
- Weight 7 lbs per 1000

APPLICATIONS


- Cabinets & Lockers
- Containers
- Fiber drums
- Truck & Railcar doors
- Liquid bulk trailers
- Liquor carts
- Transfer hoppers
- Valves

LOCKING INSTRUCTIONS

- Grip heads of seal and "tear" to remove one seal at a time
- Pass narrow end of seal through the openings of the item to be sealed
- Insert and push the end of the seal into the locking barrel
- Gently tug on the seal to ensure the locking mechanism is properly engaged
- Record seal number/color as required
- Before removal inspect for tampering
- To remove cut or pull to break at breaking point



Biodegradable
version
available

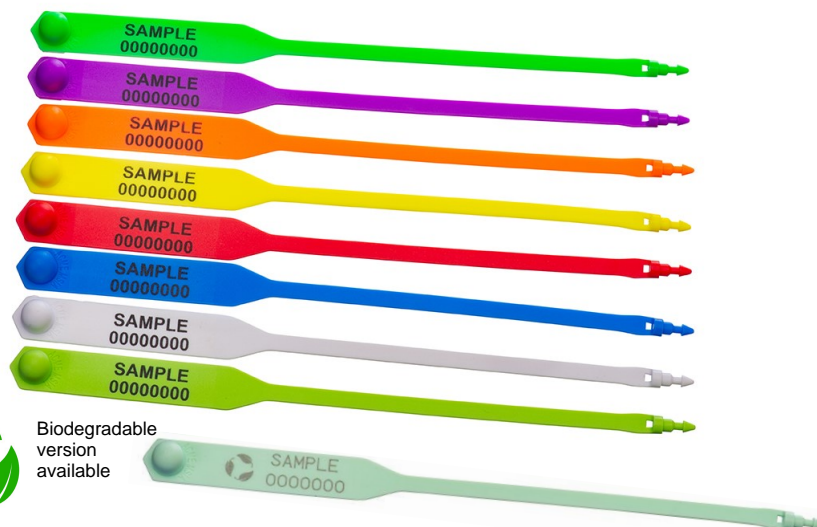


FEATURES

- Corrosion proof
- Enclosed locking mechanism
- No sealing tools needed
- Ultraviolet inhibitors and antioxidants added to extend life
- Stock seals are marked with SECURED and sequential numbering
- Colors: Green*, Purple*, Orange*, Yellow*, Red, Blue, White, Lime Green, Biodegradable Pastel Green (*Fluorescent)

SPECIFICATIONS


- Materials: Polypropylene, acetyl locking mechanism
- UV inhibitors
- Optional Biodegradable material
- Thermal Printing or optional laser engraving
- Laser Printing on Biodegradable seals
- Average breaking strength: 22+ kg/ 50+ lbs
- Operational length 7.4", Overall length 8.25"

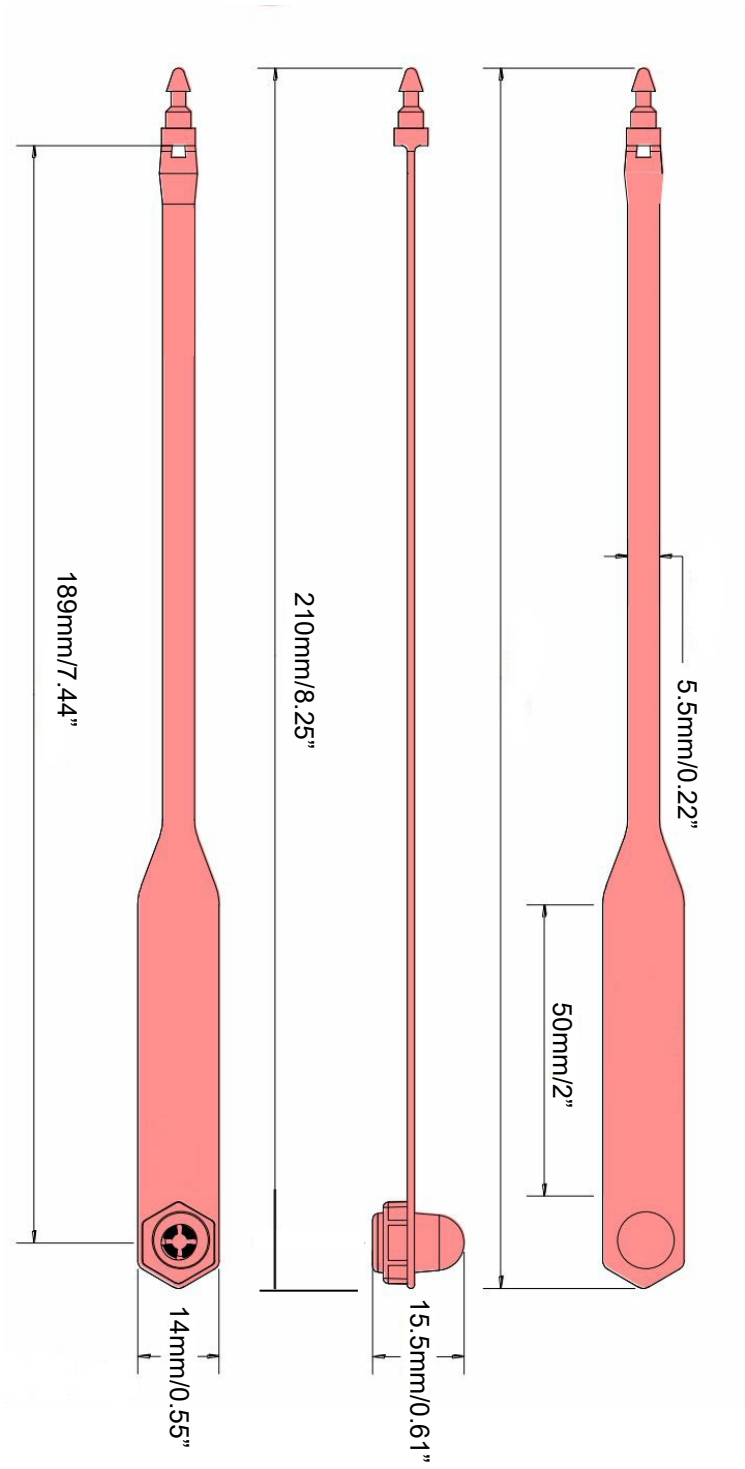



Dickey Manufacturing Company

SmartLock Seal! GA &

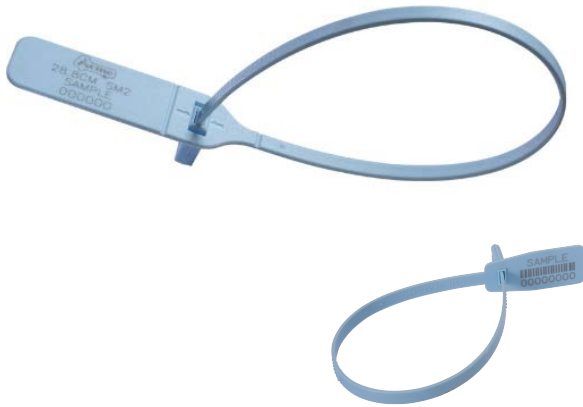

The SmartLock Seal is a fixed length seal manufactured from strong & flexible polypropylene material.

The design features a strong single point locking mechanism and an indicator which protrudes through a hole in the underside of the locking head, signifying that the seal has been properly locked.

The seal also features a break off point for easy tool-less removal; making this seal suitable for most applications.

The SmartLock Seal is available in two lengths:

- SmartLock I - 5" (13cm) Strap length (4.45" usable, 6.4" overall seal length)
- SmartLock II - 9" (24cm) Strap length (8.78" usable, 10.75" overall seal length)


Average breaking strength:

- 25 lbs

Seals are available in a variety of pastel colors and are laser engraved for increased tamper resistance. Custom engraving options include: company name, serial numbering, logos, barcoding, and "duplicate numbering" for totes or for applications that require same number seal sets.

Common Applications:


- Airline carts and cargo
- Trailers, containers, railcars
- Refineries, chemical plants, grain elevators
- Fire doors, lockers, totes, evidence bins

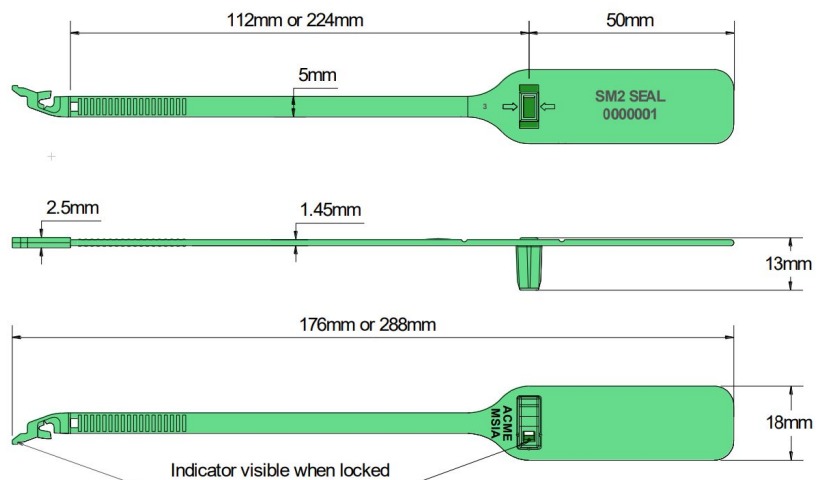



Dickey Manufacturing Company

CABLE SEALS

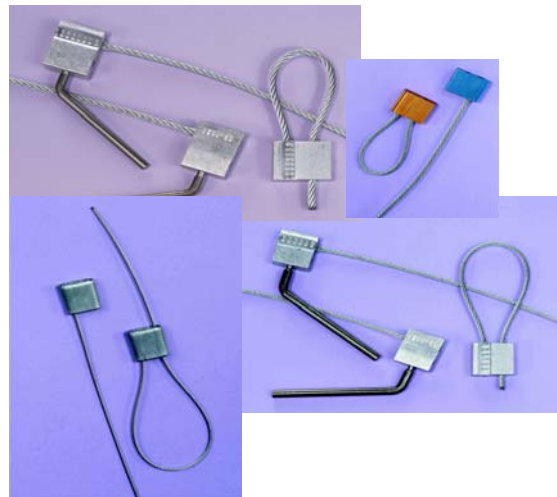

Dickey Mfg. Co. offers several types of high-strength cable seals for the transportation industry.

The Defender series & Sentry series seals are fully adjustable cable seal that allows quick tool-less application.

The Defender 5 and Defender 3.5 seals are classified as High Security seals under the ISO/PAS:17712 standard and are compliant to C-TPAT requirements.


All cable seals are available in stock versions for immediate shipment. Custom engraving, colors, and cable lengths are available.



Dickey Manufacturing Company

DEFENDER DUALY

The Defender Cable seals are used on freight containers, storage units and truck doors. The dual locking seal ensures an increased level of tamper resistance. The Defender Dually is ISO17712 compliant to the "High Security" level for international shipments.

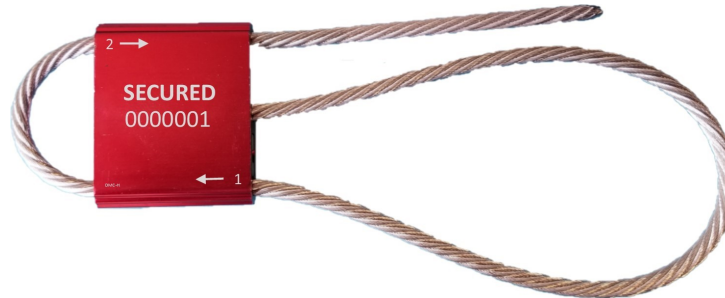

APPLICATIONS

- Freight containers
- Cross border shipments
- Gates
- Railroad freight and tank cars
- Storage units
- Truck doors
- Intermodal Containers

FEATURES

- Dual lock is resistant to tampering by ratcheting and shimming
- C-TPAT Compliant
- Rustproof aluminum body
- Tool-less application
- Heavy duty galvanized steel cable provides durability and extra strength
- Non-preformed cable wildly unravels when cut
- Flexible sealing capabilities: can seal uneven or bent locking mechanisms
- Loop diameter can be adjusted to any size
- Anodized colors
- Provides the ultimate anti-pilferage protection
- Stock seals are engraved with the word "SECURED" and sequential numbering
- Custom laser engraving available - Name, logo, serial numbering, barcodes
- Colors: Red, Blue, Green, Black



SPECIFICATIONS

- Aluminum body with galvanized steel cable
- Body size: 1.38" x 1.62" x .38"
- Cable diameter: 0.16" (4mm)
- Stock cable length: 18"
- Custom lengths available
- Custom printing: Names, Logos, Barcoding
- Numbering: Sequential
- C-TPAT Compliant - ISO 17712 Certified

LOCKING INSTRUCTIONS

- Place loose end of cable through opening of item to be sealed
- Insert cable end into first seal body to engage self locking mechanism & pull to desired length
- Insert cable end through second locking mechanism to engage added security feature
- Secure the seal by pulling cable end until tight
- Record seal number and seal color as required

REMOVAL

- Verify serial number and integrity of security seal
- While wearing proper safety equipment, shear cable with cable cutter & remove
- Dispose of used cable seal properly





Dickey Manufacturing Company

DEFENDER-5 CABLE SEAL

The Defender Cable seals are used on freight containers, storage units and truck doors. The adjustable loop diameter provides a wide application range and the flexibility to secure almost any type of container door. The seal is C-TPAT compliant for international shipments.



APPLICATIONS

- ✧ Freight containers
- ✧ Gates
- ✧ Railroad freight and tank cars
- ✧ Storage units
- ✧ Truck doors
- ✧ Intermodal Containers

FEATURES

- ✧ C-TPAT Compliant
- ✧ Rustproof aluminum body
- ✧ Tool-less application
- ✧ Heavy duty galvanized steel cable provides durability and extra strength
- ✧ Flexible sealing capabilities: can seal uneven or bent locking mechanisms
- ✧ Loop diameter can be adjusted to any size
- ✧ Anodized colors
- ✧ Provides the ultimate anti-pilferage protection
- ✧ Recyclable
- ✧ Stock seals are laser engraved with the word "SECURED" and sequential numbering

SPECIFICATIONS

- ✧ Aluminum body with galvanized steel cable
- ✧ Body size: 1.39" x 1.61" x .50"
- ✧ Cable diameter: 0.197" (5mm)
- ✧ Stock cable length: 12"
- ✧ Custom lengths available
- ✧ Laser Engraved
- ✧ Custom printing: Available soon
- ✧ Numbering: Sequential
- ✧ Average breaking strength: 4500lbs


LOCKING INSTRUCTIONS

- ✧ Place loose end of cable through opening of item to be sealed
- ✧ Insert cable end into opening of seal body to engage self locking mechanism
- ✧ Secure the seal by pulling cable until tight
- ✧ Record seal number and seal color as required

REMOVAL

- ✧ Verify serial number and integrity of security seal
- ✧ While wearing proper safety equipment, shear cable with cable cutter & remove
- ✧ Dispose of used cable seal properly



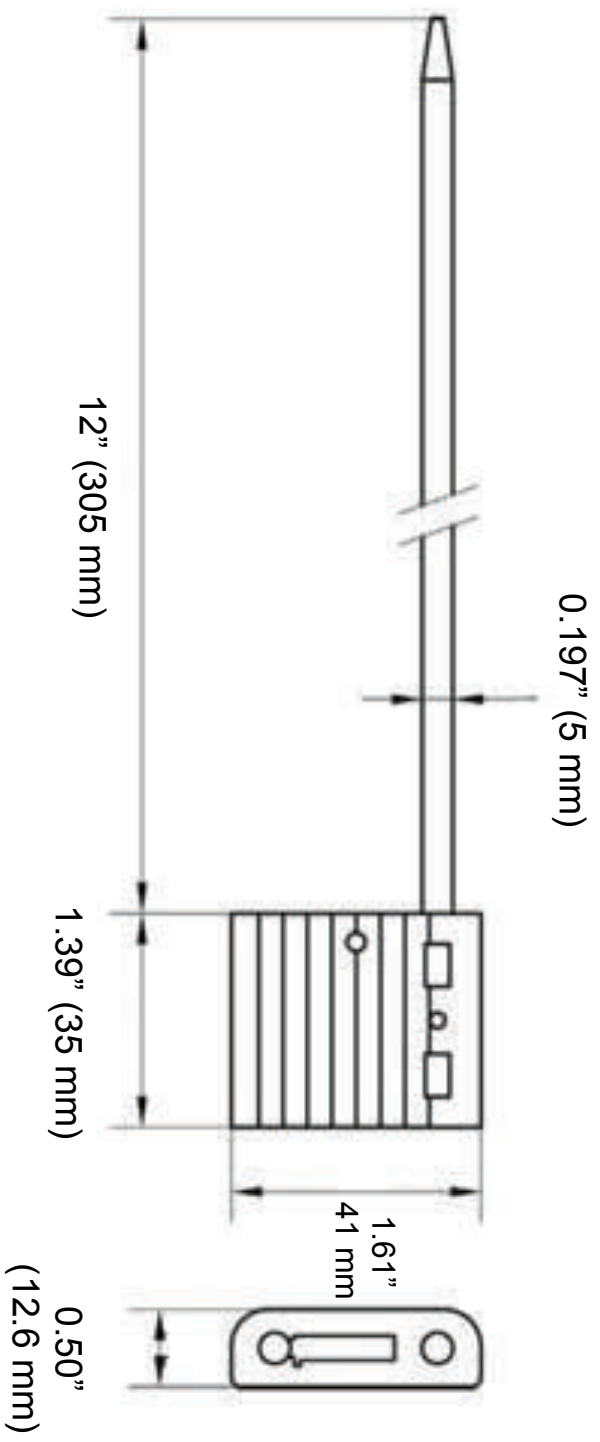


Defender-5.0 Cable



Dickey Manufacturing Company

DEFENDER 3.5 CABLE SEAL

The Defender Cable seals are used on freight containers, storage units and truck doors. The adjustable loop diameter provides a wide application range and the flexibility to secure almost any type of container door. The Defender 3.5 is ISO17712 compliant the to the “High Security” level for international shipments.

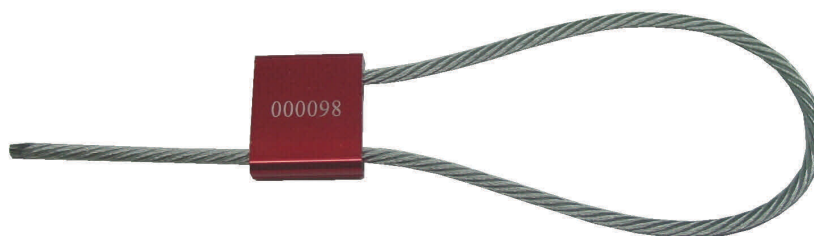

APPLICATIONS

- ↗ Freight containers
- ↗ Gates
- ↗ Railroad freight and tank cars
- ↗ Storage units
- ↗ Truck doors
- ↗ Intermodal Containers

SPECIFICATIONS

- ↗ Aluminum body with galvanized steel cable
- ↗ Body size: 1.30" x 1.19" x .37"
- ↗ Cable diameter: 0.14" (3.5mm)
- ↗ Stock cable length: 12"
- ↗ Custom lengths available
- ↗ Custom printing:
- ↗ Numbering: Sequential

FEATURES

- ↗ C-TPAT Compliant
- ↗ Rustproof aluminum body
- ↗ Tool-less application
- ↗ Heavy duty galvanized steel cable provides durability and extra strength
- ↗ Flexible sealing capabilities: can seal uneven or bent locking mechanisms
- ↗ Loop diameter can be adjusted to any size
- ↗ Anodized colors
- ↗ Provides the ultimate anti-pilferage protection
- ↗ Recyclable
- ↗ Stock seals are engraved with the word “SECURED” and sequential numbering


LOCKING INSTRUCTIONS

- ↗ Place loose end of cable through opening of item to be sealed
- ↗ Insert cable end into opening of seal body to engage self locking mechanism
- ↗ Secure the seal by pulling cable until tight
- ↗ Record seal number and seal color as required

REMOVAL

- ↗ Verify serial number and integrity of security seal
- ↗ While wearing proper safety equipment, shear cable with cable cutter & remove
- ↗ Dispose of used cable seal properly



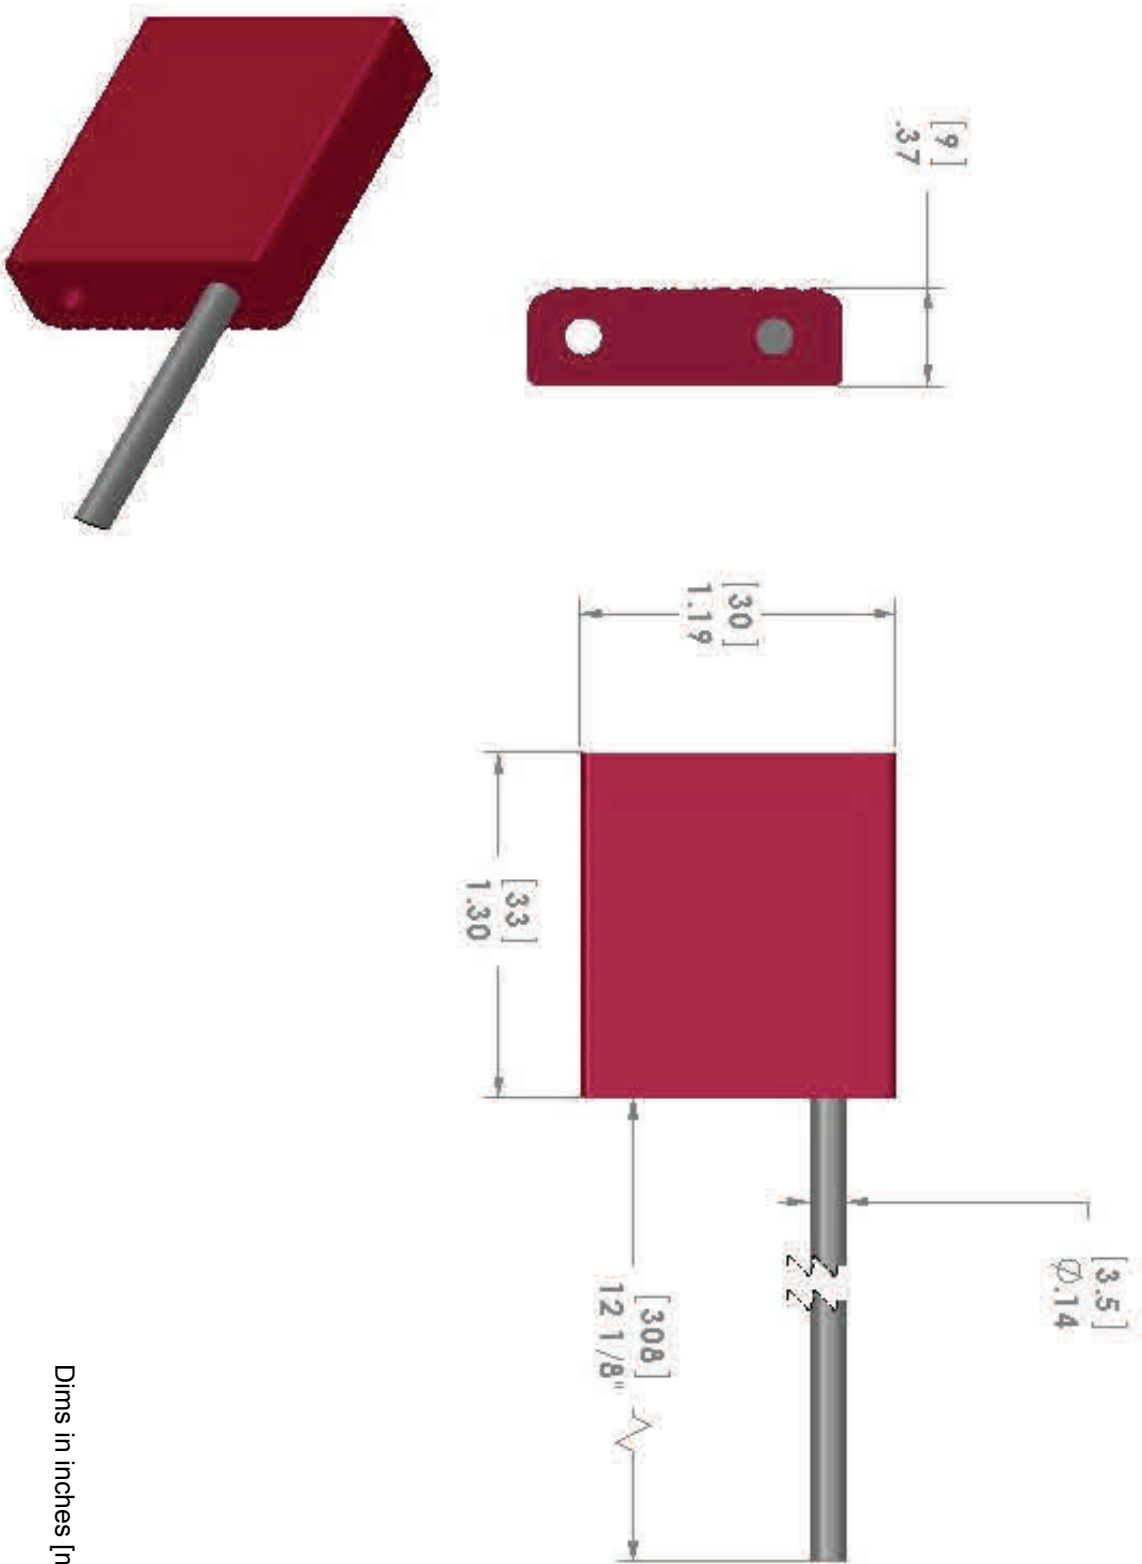

Dim's in inches [mm]

Defender 3.5 Cable



Dickey Manufacturing Company

SENTRY CABLE SEALS



The Sentry Cable seal is a one-piece security seal that is easily adjustable to length and features an automatic locking mechanism. The Sentry seal is a multi purpose seal used throughout the shipping and security industry.

APPLICATIONS

- ☞ Freight containers
- ☞ Gates
- ☞ Railroad freight and tank cars
- ☞ Storage units
- ☞ Truck doors

PACKAGING

- ☞ Up to 500 per box
- ☞ Gross weight per box:
 - 100pcs: 5 lbs.
 - 500pcs: 25 lbs.

SPECIFICATIONS


- ☞ Body size: 7/8" X 7/8" X 5/16"
- ☞ Cable diameter: 1/16"
- ☞ 12" usable cable length on stock item; custom lengths are available
- ☞ Custom printing: 2 lines, 7 characters with a .093" character font size
- ☞ Custom logos and font sizes are available
- ☞ Numbering: 7 digits
- ☞ Pull strength: Average 700 lbs



FEATURES

- ☞ Solid, rust proof zinc body
- ☞ Heavy duty galvanized 7 X 7 steel cable provides durability and extra strength
- ☞ Loop diameter can be adjusted to any size
- ☞ Provides the ultimate anti-pilferage protection
- ☞ Tool free, keyless cable seal
- ☞ Stock seals available for rush shipments stamped with the word "SECURED" and sequential numbering

LOCKING INSTRUCTIONS

- ☞ Place loose end of cable through opening of item to be sealed
- ☞ Insert end into opening of seal body and pull to desired loop length, the smallest diameter possible offers the best protection
- ☞ Gently tug on seal to ensure it is properly locked
- ☞ Record seal number as required



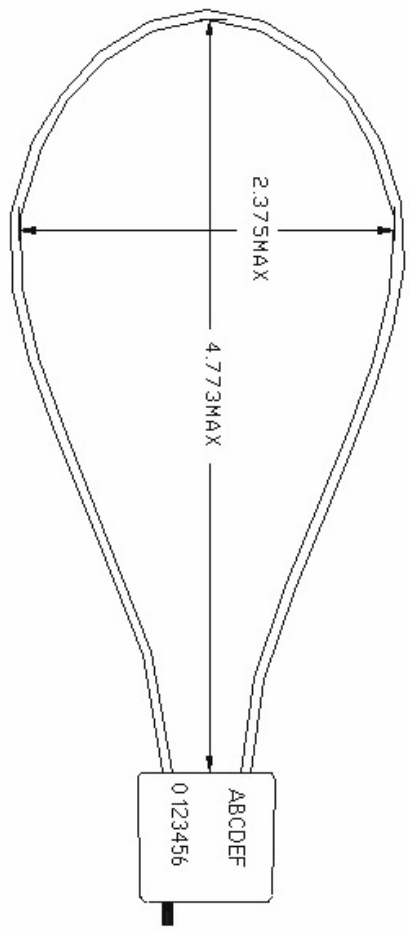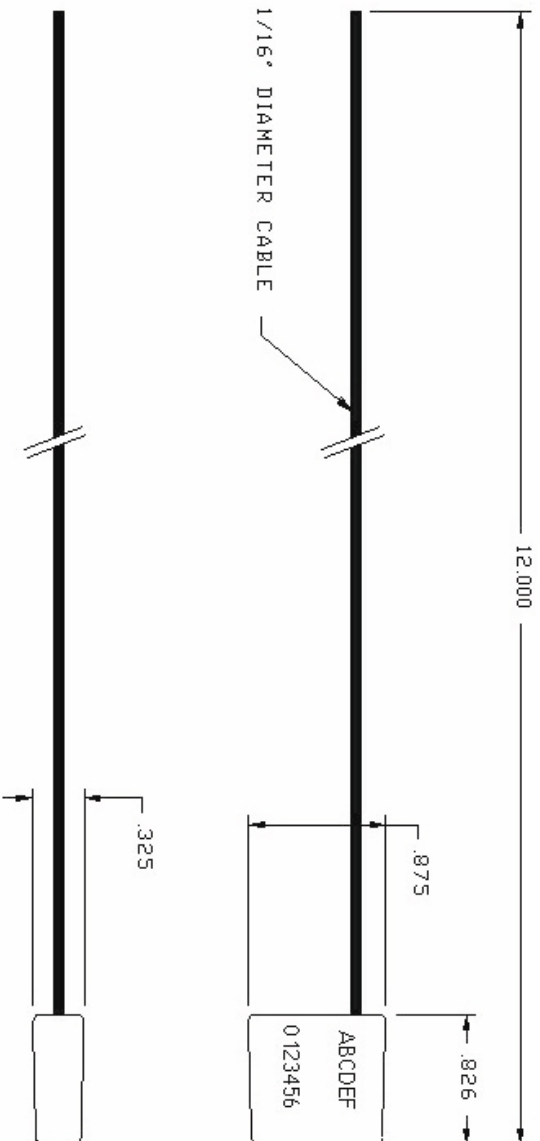


Sentry Cable



Dickey Manufacturing Company

DEFENDER 1.5 CABLE SEAL

The Defender Cable seals are used on containers, hoppers, valves, storage units and truck doors. The adjustable loop diameter provides a wide application range and the flexibility to secure most any type of hasp.

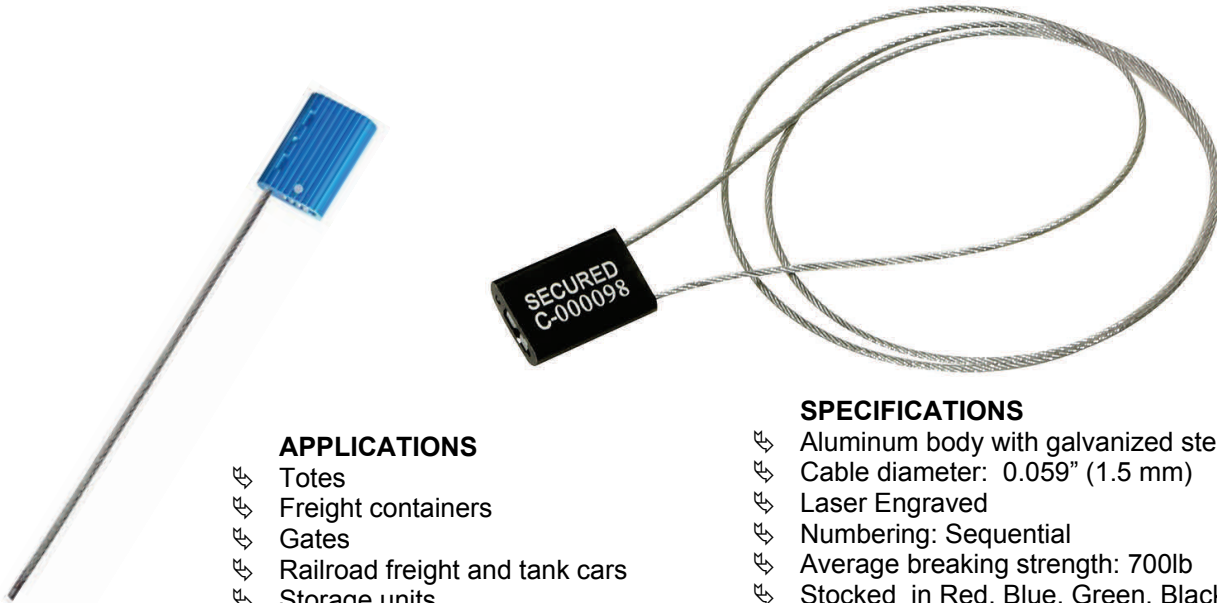

APPLICATIONS

- ✧ Totes
- ✧ Freight containers
- ✧ Gates
- ✧ Railroad freight and tank cars
- ✧ Storage units
- ✧ Truck doors
- ✧ Inspection Doors

SPECIFICATIONS

- ✧ Aluminum body with galvanized steel cable
- ✧ Cable diameter: 0.059" (1.5 mm)
- ✧ Laser Engraved
- ✧ Numbering: Sequential
- ✧ Average breaking strength: 700lb
- ✧ Stocked in Red, Blue, Green, Black w/ 12" cable & Black w/ 36" cable;
- ✧ Custom lengths available
- ✧ Custom printing
- ✧ Choice of anodized colors

FEATURES

- ✧ Rustproof aluminum body
- ✧ Tool-less application
- ✧ Strong galvanized steel cable provides durability and strength
- ✧ Flexible sealing capabilities: can seal uneven or bent locking mechanisms
- ✧ Small diameter cable small hasp
- ✧ Loop diameter can be adjusted to any size
- ✧ Easy to identify colors for quick identification
- ✧ Provides secure anti-pilferage protection
- ✧ Recyclable materials
- ✧ Stock seals are laser engraved with the word "SECURED" and sequential numbering


LOCKING INSTRUCTIONS

- ✧ Place loose end of cable through opening of item to be sealed
- ✧ Insert cable end into opening of seal body to engage self locking mechanism
- ✧ Secure the seal by pulling cable until tight
- ✧ Record seal number and seal color as required

REMOVAL

- ✧ Verify serial number and integrity of security seal
- ✧ While wearing proper safety equipment, shear cable with cable cutter & remove
- ✧ Dispose of used cable seal properly



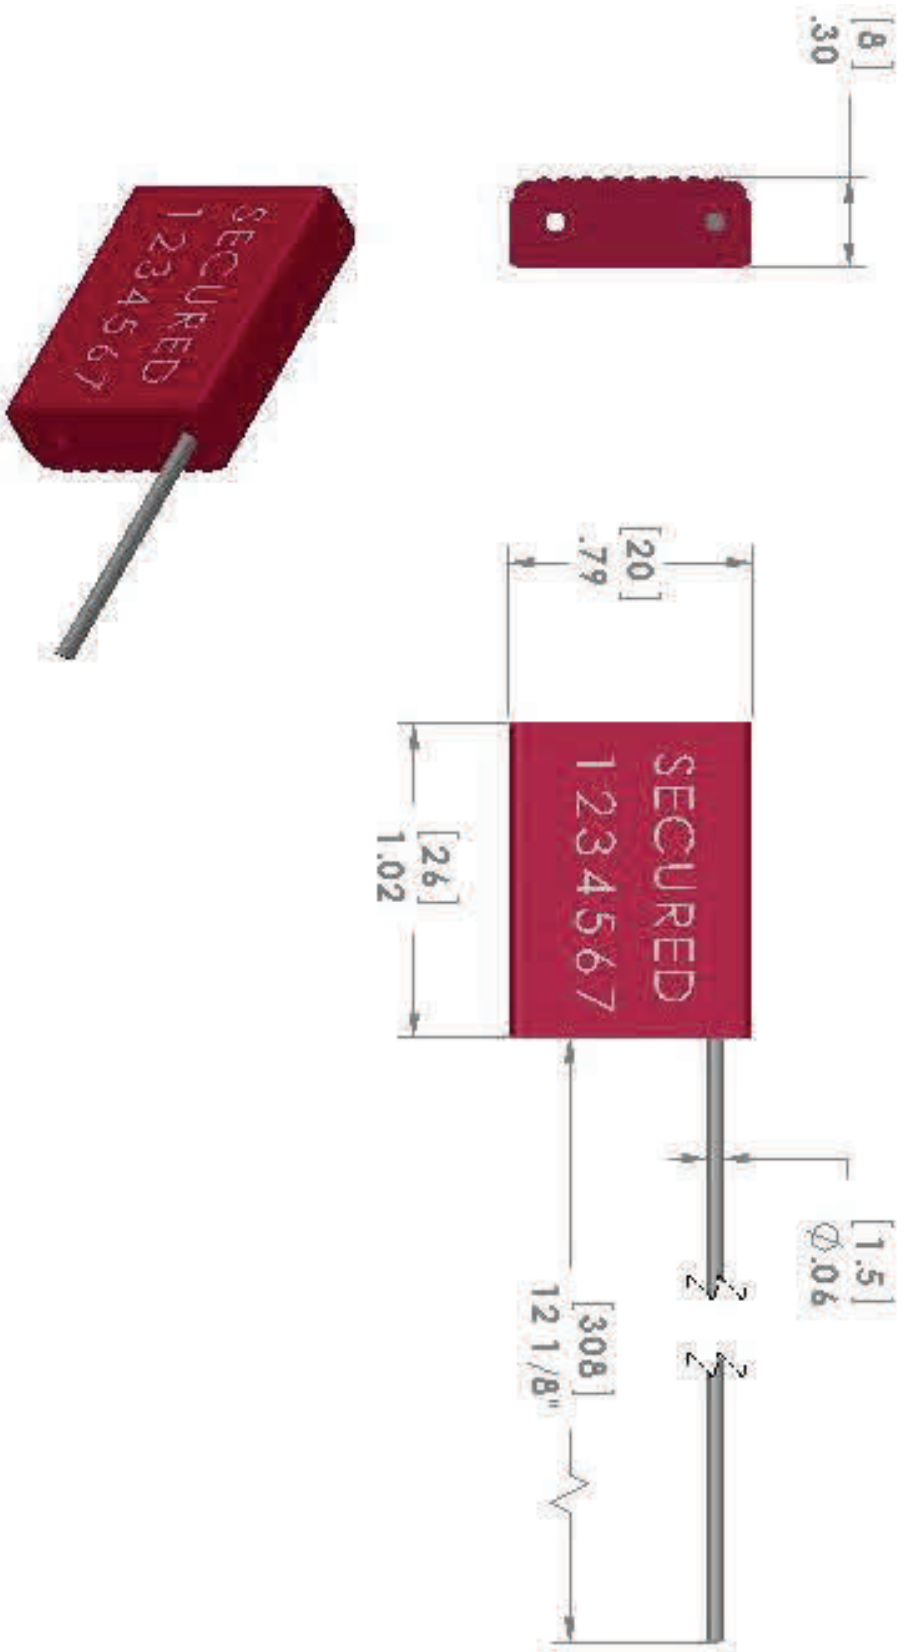


Defender-1.5 Cable



Dickey Manufacturing Company

UTILITY & ALL PURPOSE SEALS

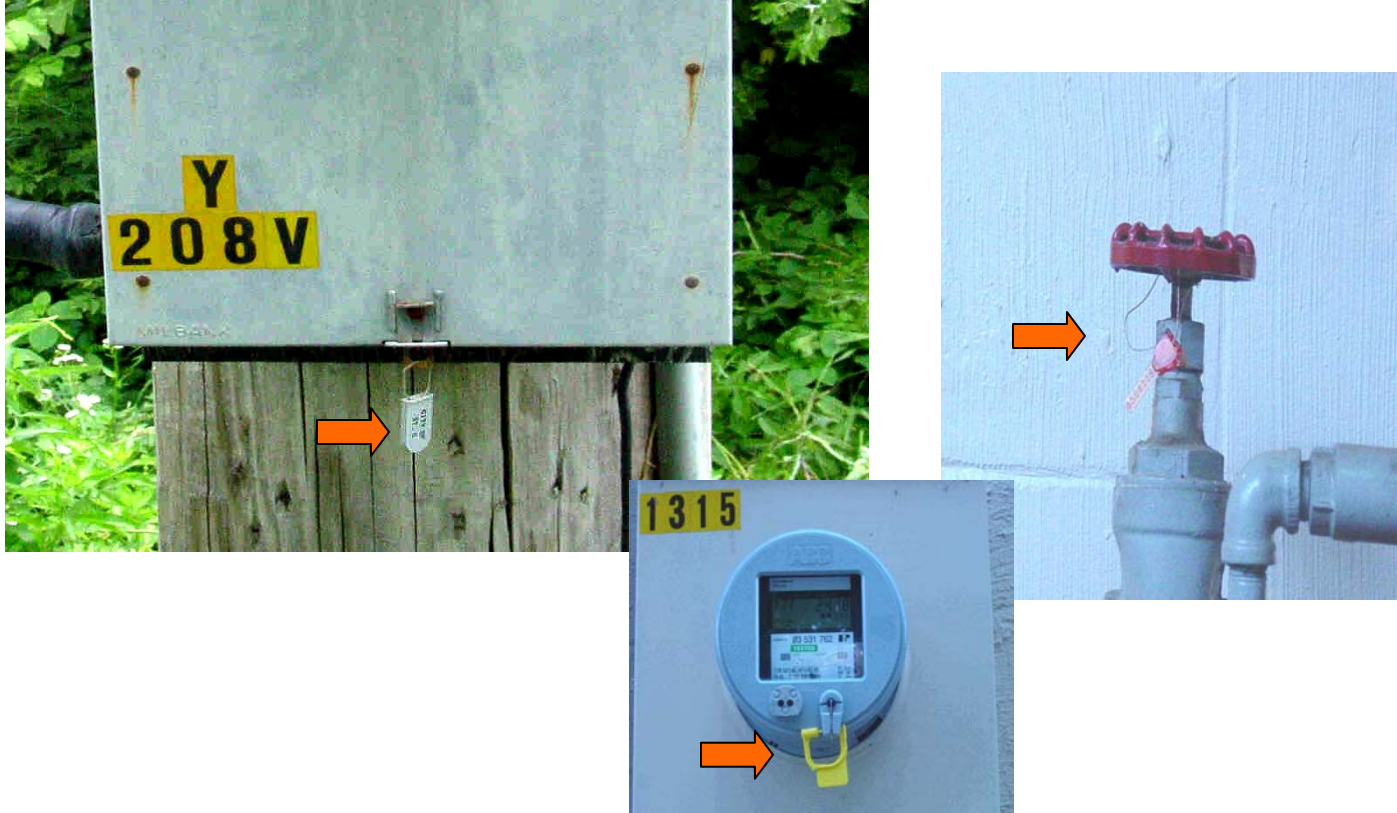

Dickey Mfg. Co. offers several utility and all-purpose seals that can be used on a wide variety of applications.

The Plastic Padlock Seals are U.S. Customs approved and are offered with several configurations of wire hasps, making the seal adaptable to numerous applications. The Plastic Padlock is available in 20 eye-catching colors as well as custom matched colors. Available in stock for immediate shipments or custom-made to your specifications, the Plastic Padlock seal is a versatile easy to use security seal.


The utility-friendly Demand Seal is used on monthly reset meters. The easily removable and highly effective Demand seal is also the perfect seal for use on emergency medical kits and carts or any application where quick, easy, and immediate removal is a necessity.

Lead Seals & Trident Seals are all purpose seals serving a variety of applications. These easy to use and effective seals remain the standard for pumps, valves, and utility meters. Lead seals are standard use on exterior applications. The Trident seal is an environmentally friendly lead replacement used where exposure to soft lead is restricted.



Dickey Manufacturing Company

PLASTIC PADLOCK SEALS

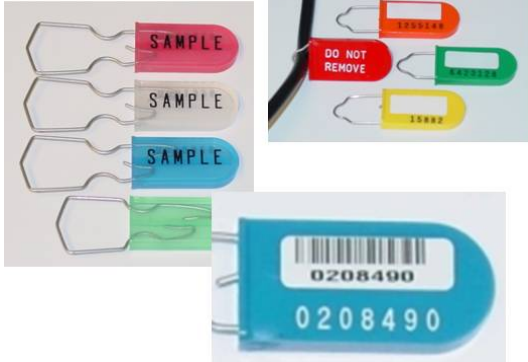

Plastic Padlock seals come in a variety of hasps and numerous colors. Often used on utility meters or co-axial cable the Plastic Padlock is U.S. Customs approved. Widely used by the airline & utility industries the padlock offers anti-pilferage diversity.

APPLICATIONS

- ✦ Aircraft liquor carts
- ✦ US & UK Customs Approved
- ✦ Drums
- ✦ Hoppers
- ✦ Medical cabinets
- ✦ Switches
- ✦ Valves
- ✦ Utility meters

PACKAGING

- ✦ 50 seals per wire bundle
- ✦ Optional bagging – 100 seals per bag
- ✦ 1,000 per box, 5 boxes per master carton
- ✦ Box dimensions: 10 1/2" X 15" X 30"
- ✦ Gross weight 9 lbs. per 1,000 for Regular Hasps, 8 lbs. per 1,000 for Cable Hasps

SPECIFICATIONS

- ✦ Materials: Polyethylene (standard), Polypropylene (optional), Transparent (optional)
- ✦ Body size: .75" X 1.50" X .17", Wire dimensions: **Regular hasps:** .047", 18 AWG **Coaxial hasps:** .041", 19 AWG
- ✦ Breaking strength: 100 lbs. (Regular hasp)
- ✦ Custom printing up to 39 characters on three lines and sequential numbering up to 7 digits
- ✦ Bar-coding with serial number replicated in hot-stamping for added tamper resistance.
- ✦ Logos are available by request
- ✦ Write-on areas available on one or both sides
- ✦ Colors available are white, green, yellow, orange, blue, red, gray, brown, ivory, gold, purple, burgundy, teal, pink, light blue, rust, black and custom colors upon request






FEATURES

- ✦ Corrosion resistant galvanized wire, stainless steel optional
- ✦ Also available in stainless steel for added life or for use in the food industry
- ✦ Varieties of hasp designs including one specially shaped to grasp coaxial cable
- ✦ UV protection to ensure consistent color and added seal life
- ✦ Recyclable
- ✦ Stock seals available for rush shipments hot stamped "SECURED" with sequential numbering and various options
- ✦ Bar-code and hot stamped numbers available on the same seal
- ✦ Optional scoring available for tool-less removal







LOCKING INSTRUCTIONS

- ✦ Remove one side of the wire hasp and insert through item to be secured.
- ✦ Reinsert the wire hasp and close wire with your hand until it becomes flush with the plastic body.
- ✦ Scored hasps are removed by grasping body and twisting wire hasp until it snaps then remove seal and dispose of properly
- ✦ Unscored hasps are required to be removed with wire cutters
- ✦ Record seal number as required, if the optional write on area is available add name, date, or other necessary information









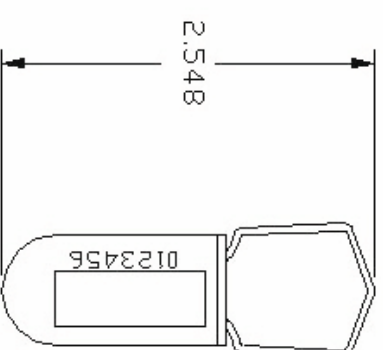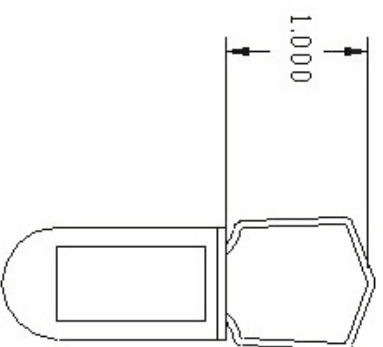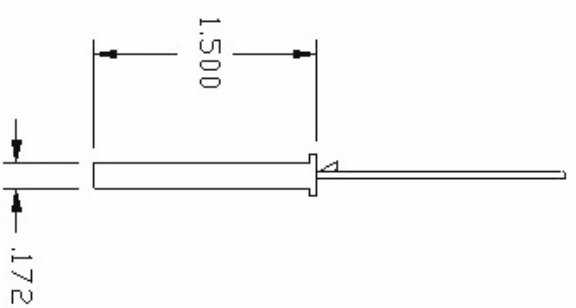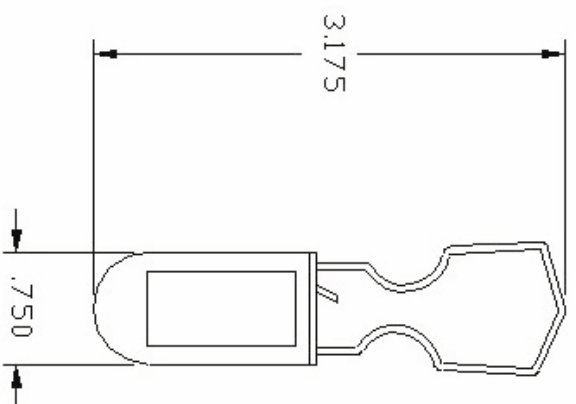

Plastic Padlock – Regular Hasp

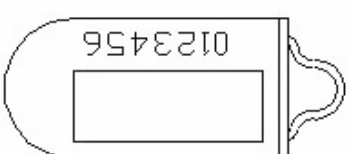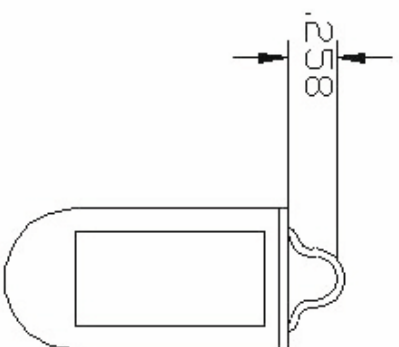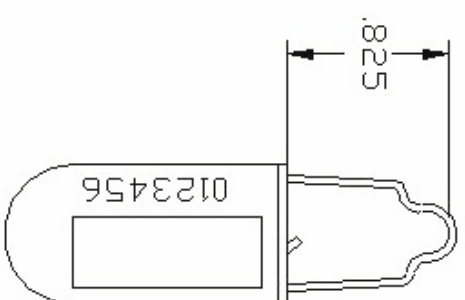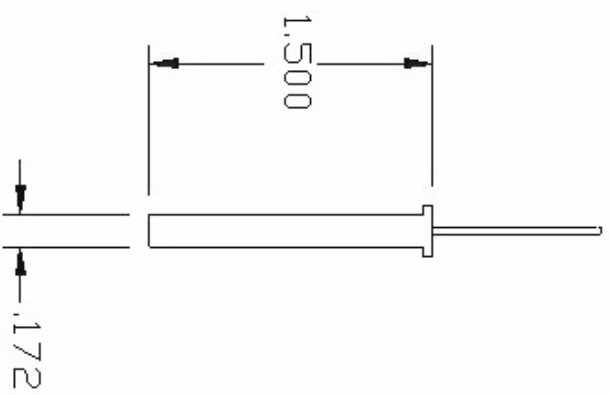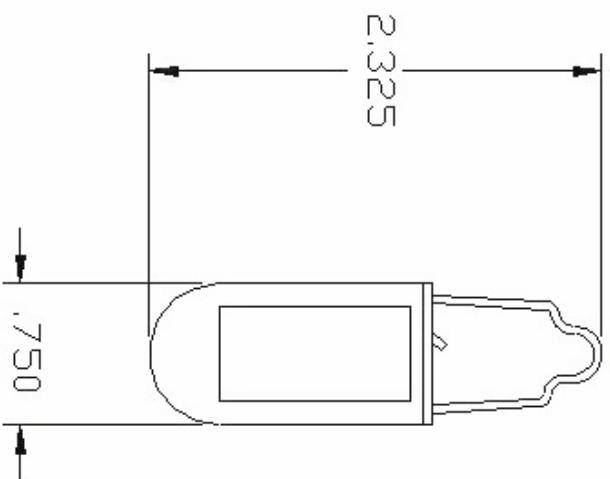

Plastic Padlock - Coaxial Hasp

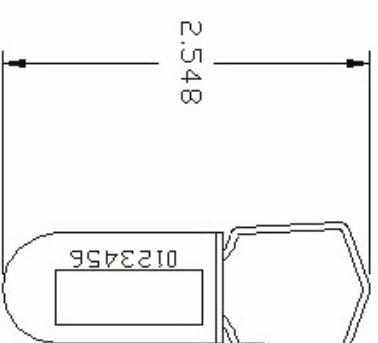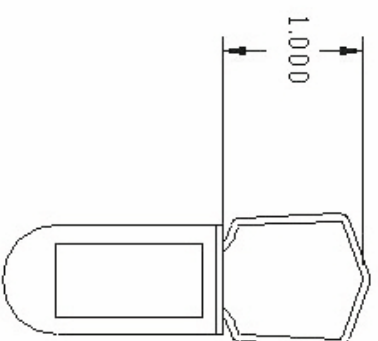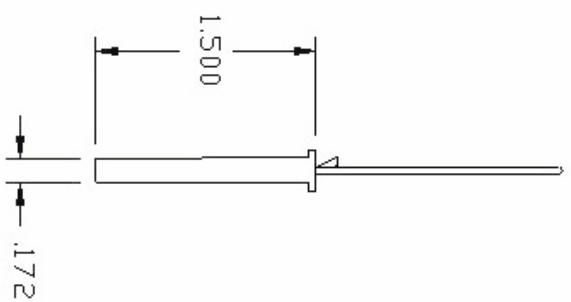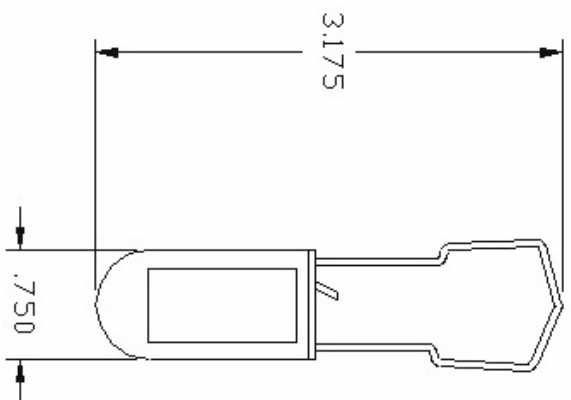

Plastic Padlock - Straight Hasp



Dickey Manufacturing Company

Heavy Duty Padlock Seal

Part # 90701A

The DMC Heavy Duty Padlock Seal is the perfect solution for applications requiring a stronger breaking strength than standard tamper evident seal. The HD Padlock Seal offers increased tensile strength, are highly tamper evident, and are laser engraved with a unique serial number.

The HD Padlock is the perfect solution for Lockout/Tagout (LOTO) programs. Accidental energizing or start up of machinery can easily be prevented when using this padlock seal during maintenance or repairs.

The additional strength makes the seal ideal for applications that are exposed to rough or extreme environments. Railcar and tractor trailers can benefit from the overall toughness and durability of the HD Padlock Seal.

APPLICATIONS:


- Lockout Tagout (LOTO) Applications
- Railcars
- Cargo Trailers
- Hoppers
- Electrical Boxes / Control Panels
- Liquor Storage Cabinets
- Any application where a padlock hasp is available

SPECIFICATIONS:

- ABS Plastic & Zinc Plated Steel
- Tool-less Application
- Laser engraved
- 0.16" (4mm) diameter hasp
- Hasp opening: ID: 1.60" x 3.15" (20mm x 40mm)
- Average breaking strength exceeds 220 lbs (100kg)
- Stock item: Yellow or High Visibility Orange
- Lased "SEALED" & with a seven digit serial number
- Requires small bolt cutters to remove



HD Padlock Seal

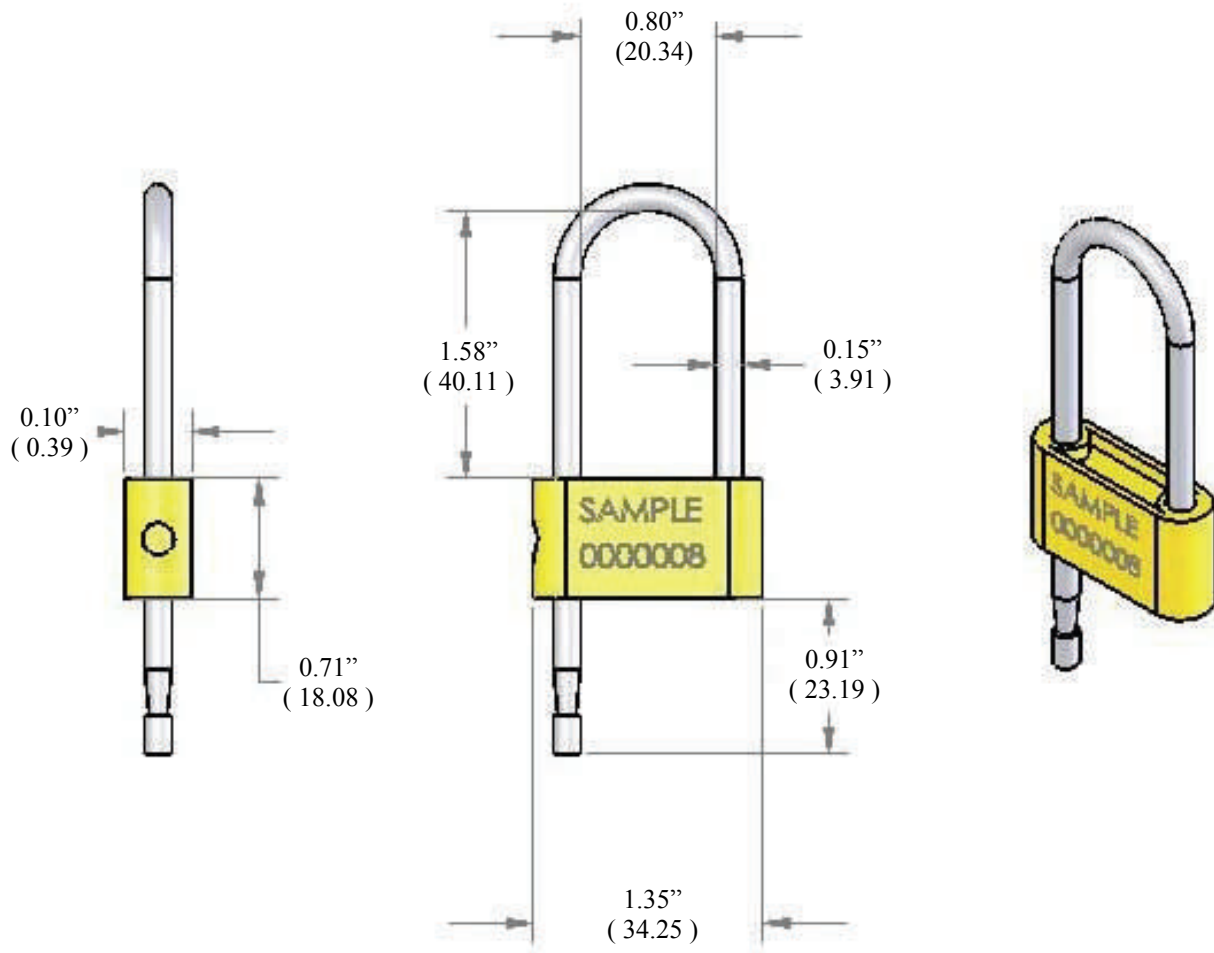

* Dimensions in inches (mm)



Dickey Manufacturing Company

Demand Seal

Common Applications:

- Medical Cabinets
- Cash Bags
- Crash Carts
- Liquor Cart Doors
- Electric, Gas, & Water Meters
- Totes
- Evidence boxes
- ATM Cassettes
- Ammunition Boxes
- Inspection Doors
- Zippered Cash Bags
- Tool Boxes



Features:


- Designed for easy tool-less application and removal
- Consecutive numbering, custom printing of name, barcoding, and logos available
- Sturdy hinge allows one hand closing
- Easily removes without causing damage yet strong enough to prevent accidental breakage
- Polypropylene Plastic
 - Blushes if tampered
 - Recyclable
- Available as a Stock item or can be Customized
- Molded in a wide variety of color options

Specifications:

- Average pull-apart force: 8lbs
- Polypropylene Plastic

Packaging:

- 100 Seals per bag, up to 5000 seals per case
- One case: 24"x12"x15", 18 lbs.

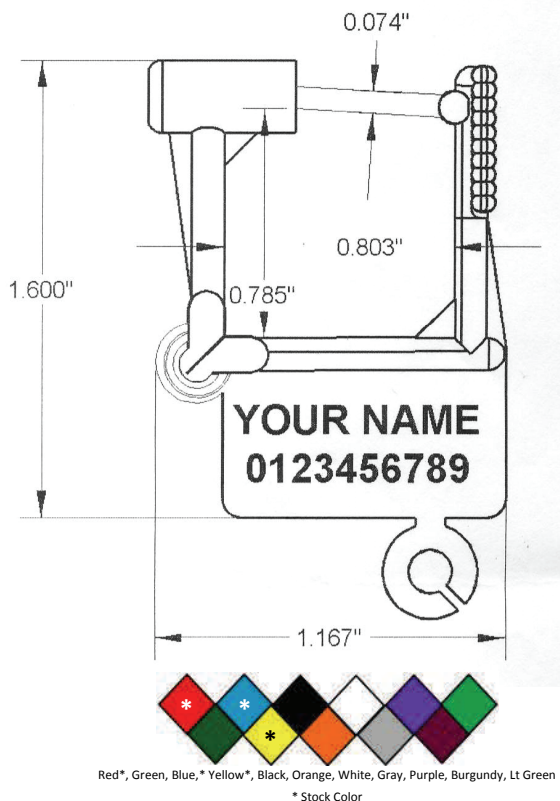



Dickey Manufacturing Company

LEAD & WIRE SEALS and Lead Press



Lead and wire seals are often used with small diameter openings such as drums, hoppers and valves. Seals are available with copper, galvanized, tinned, bright annealed, monel or stainless steel wire. The lead and wire seals come pre-assembled or the components are available separately. Hand presses are available blank or with custom engraved letter/logo dies.

APPLICATIONS

- ↗ Drums
- ↗ Hoppers
- ↗ Valves
- ↗ Any application with a small diameter opening

LOCKING INSTRUCTIONS

- ↗ Place wire through opening of item to be sealed
- ↗ Pull wire through hole in seal to achieve proper length of loop desired
- ↗ Place lead part of seal into press and fully compress – this will close the openings in the lead seal
- ↗ Gently pull on seal to check if it is properly locked
- ↗ Record seal number as required

SPECIFICATIONS

- ↗ Lead diameters available: 5/16", 7/16", 3/8", 1/2", 9/16"
- ↗ A star shaped lead is available with sequential numbering and lettering
- ↗ Lead seals without wires are available with two holes and a connecting slot for increased security
- ↗ Plain lead with two holes also available
- ↗ Wire is available in copper, galvanized, tinned, bright annealed, monel or stainless steel
- ↗ Wire also available with 2, 3 or 4 strands
- ↗ Numerous wire gages are available for custom applications

FEATURES

- ↗ Numerous combinations of lead and lengths of wire available to suit the needs of your company
- ↗ Sealing press available with dies to include numbering or lettering for identification
- ↗ Available pre-assembled or can be assembled at your location
- ↗ Press – Stainless Steel construction with longer than standard handles make crimping easy

PACKAGING

- ↗ Varies with quantity ordered and seal specifications
- ↗ Standard is 100 per bundle





Dickey Manufacturing Company

Lead Discs, Sealing Wire & Crimping Tool

Lead Disc (diameter)	Can be ordered with no wire, pre-cut wire sections, or wire attached	
	Plain	Slotted
5/16"	X	
3/8"	X	X
7/16"	X	X
1/2"	X	X
9/16"		X
Star Numbered		X



Plain* = Two round holes through disc

Slotted* = Two square holes with connecting slot.

Slot allows wire to be embedded within disc when crimped

Wire Material	Gauge	Diameter (in)	# Strands
Copper	27	0.014	3, 4
	26	0.016	1, 2, 3, 4
	25	0.018	1, 2, 3
	22	0.025	1, 2
Galvanized	30	0.014	1, 2, 3, 4
	26	0.018	1, 2, 3
	23	0.026	1, 2
	20	0.035	1
Bright Annealed	23	0.026	1, 2
Stainless Steel	27	0.015	3, 4
Monel	27	0.014	3, 4
Tin-Coated Copper	23	0.014	1, 2
Copper Coated Steel	23	0.014	1, 2



Spools are available in 250, 500 or 1000 foot lengths.
Twisted wire can be ordered in pre-cut lengths




Crimping Pliers
Stainless steel body
Long handles for easy crimping
Custom engraved dies available



Dickey Manufacturing Company

TRIDENT SEALS

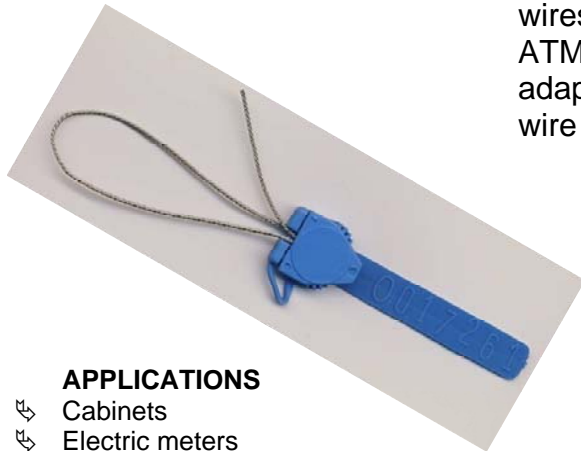

APPLICATIONS

- ↗ Cabinets
- ↗ Electric meters
- ↗ Fiber drums
- ↗ Locking rings
- ↗ Electric, gas and taxi meters
- ↗ Postage machines
- ↗ Fire extinguishers
- ↗ Transfer hoppers
- ↗ ATM currency cassettes
- ↗ Truck and railcar
- ↗ All lead seal applications

PACKAGING

- ↗ 100 or 250 per bag (varies depending on wire length)
- ↗ 1000/box
- ↗ Approximate weight: 5 lbs per 1000

SPECIFICATIONS

- ↗ Materials: Polycarbonate or Polypropylene body and insert, Polycarbonate body has a stainless steel wire and the Polypropylene body has a galvanized wire
- ↗ Operational length: wires from 6" to 24" lengths in 2" increments
- ↗ Random numbering of seven digits
- ↗ Available with company logo or name engraved
- ↗ Logo dimensions: 1/2"
- ↗ Colors available are clear, white, green, yellow, orange, blue, red, gray, black, and brown

Trident seals come in both polypropylene and polycarbonate plastic with galvanized or stainless steel wires. A special purpose, all plastic version is available for ATM cassette use. The versatility of the Trident seal adapts it to many applications. The ability to have custom wire lengths adds to the flexibility of the seal.



FEATURES

- ↗ No sealing tool required
- ↗ Alternative where a lead seal can not be used
- ↗ Durable material
- ↗ Stock available for rush shipments on certain items
- ↗ Multiple sealing thread lengths
- ↗ High relief numbers
- ↗ Polycarbonate clear plastic body makes it possible to determine if tampering has occurred



LOCKING INSTRUCTIONS

- ↗ Pass the wire through the device to be sealed
- ↗ Bend wire around the center part of the anchor
- ↗ Pull wire tight to ensure a proper sealing
- ↗ DO NOT overwrap the wire around the anchor or it will not close properly
- ↗ Close the capsule over the anchor and wire; you will hear a "Click" sound once the seal is properly closed
- ↗ Make sure the wire does not overlap, but lays next to the wire already attached to the anchor
- ↗ Tug on the seal to ensure it is properly sealed
- ↗ Record seal number as required



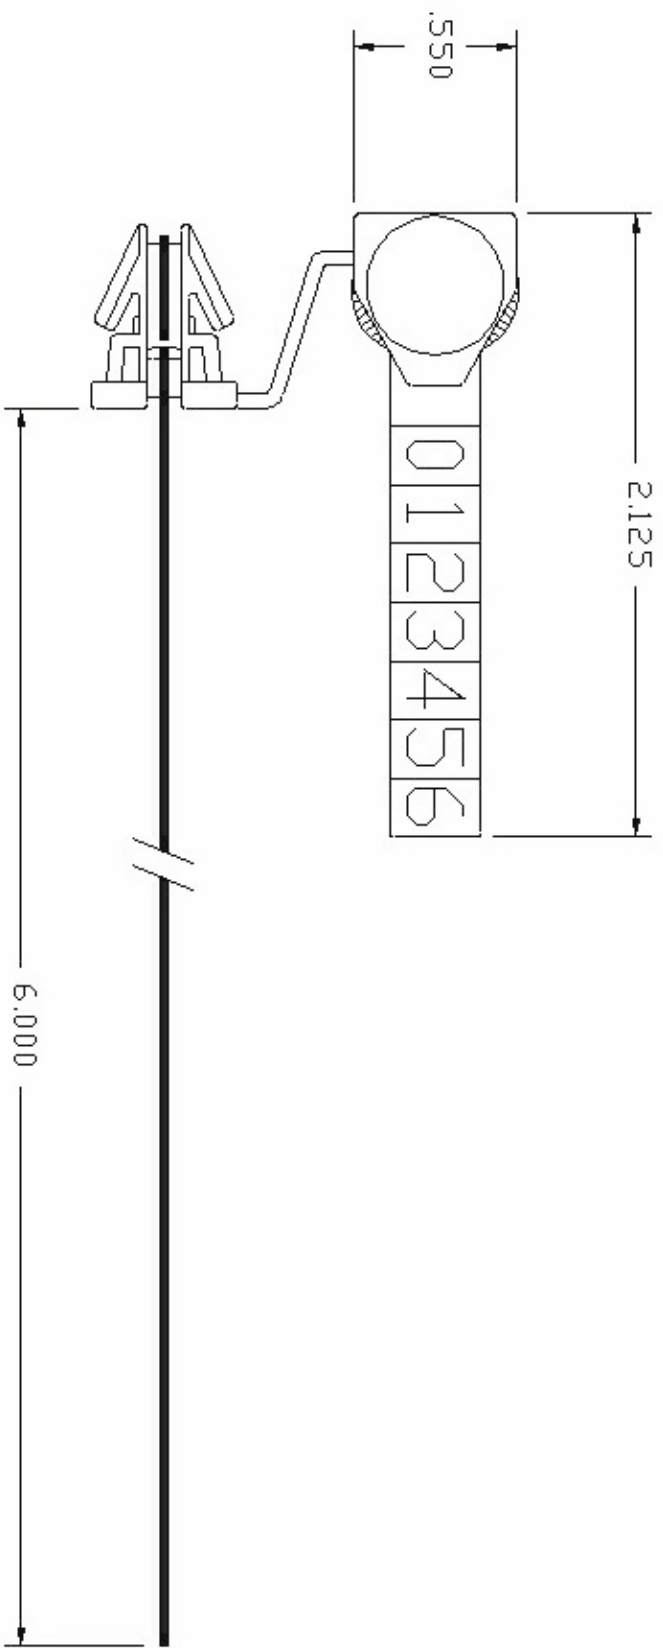

Trident 6"

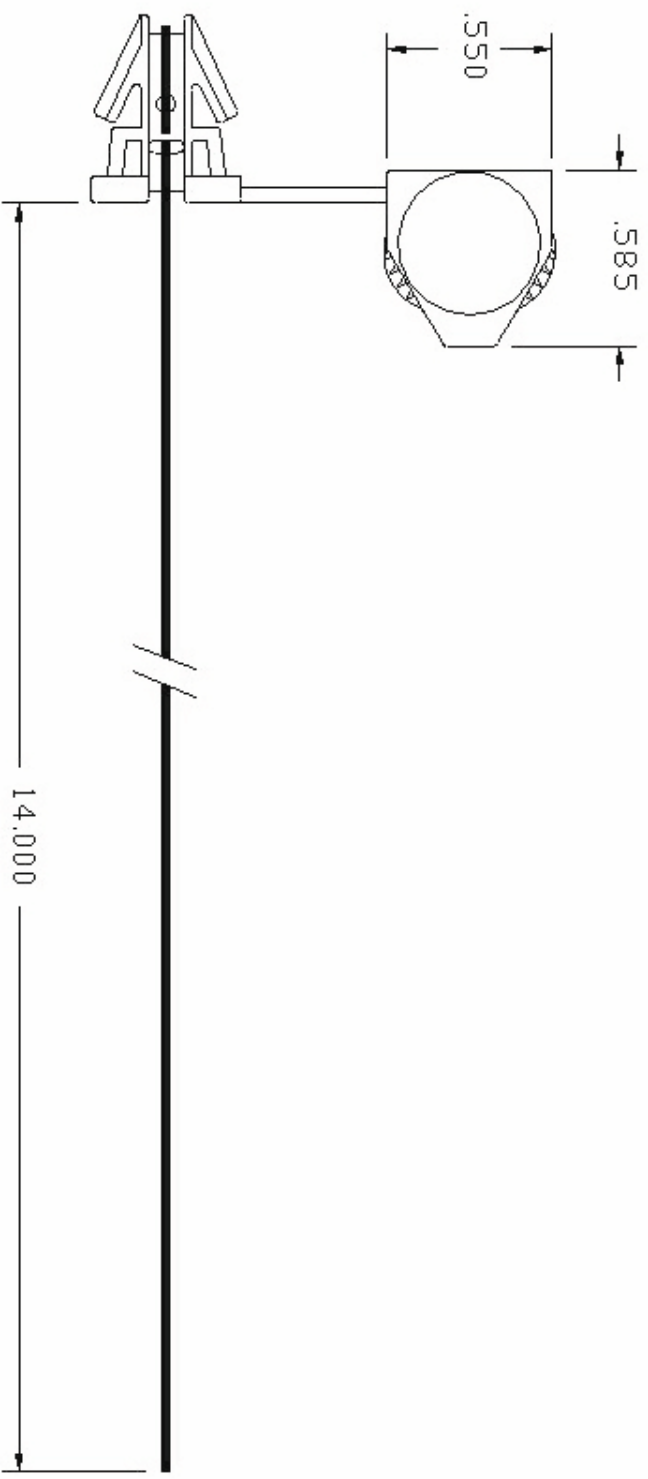

Trident 14" - (non-numbered)



Dickey Manufacturing Company


MULTI-PURPOSE SEALS

Multi-purpose seals made of polypropylene or nylon offers a variety of options for the security conscious user.

Dickey Mfg. Co. offers several multi-purpose seals in stock for immediate shipments or the option of custom made seals.

The Cinch Tite, Pull Tight, and Ziplok Seals offer multiple lengths, identifiable colors, and traceable numbering. Self-releasable Cinch Tite and Ziplok seals have the added feature of easy tool-less removal.


Tamper evident tapes and labels are offered in various colors, lengths, and styles. Several adhesives are available, from very aggressive to extended term use, depending on requirements. Tamper evident tapes and labels used on shipping containers, courier packages and envelopes, as well as cardboard boxes, offer versatility and peace of mind that shipments arrive intact.

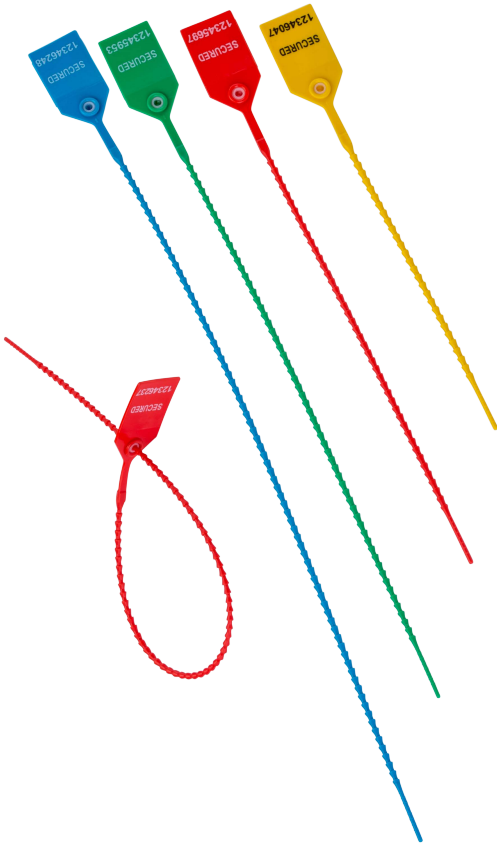



Dickey Manufacturing Company

Beaded Pull Tight Seal UV

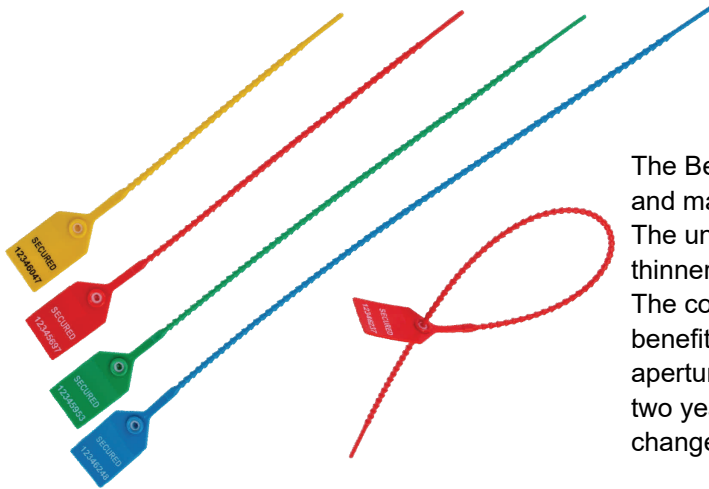


The Beaded Pull Tight's streamlined design strengthens the seal and makes it smooth and easy to use when securing items. The uniquely engineered Beaded Pull Tight Seal maintains a thinner diameter yet is stronger than industry alternatives. The combination of strength and thinner diameter is a critical benefit when securing items requiring the seals to fit through small apertures. Now with UV inhibitors. SGS tested to the equivalent of two years UV exposure resulting in no visible signs of color change, chalking or cracking. (ISO 4892-3:2016)

Common Applications:

- Trailer doors
- Bulk tankers
- Railroad cars
- Storage cabinets
- Storage totes
- Storage boxes
- Cash-in-transit

Features:

- Made of high-density polyethylene enhanced with UV inhibitors for greater durability in extreme weather.
- High temperature resistant locking chamber.
- "Clean Break" design ensures that individual seals detach from the strip without plastic waste.
- 40 lb. tensile strength.
- Extended flag size for additional information on the tab.
- Available in six colors: red, blue, green, yellow, orange, and white.
- Printing of text, serial numbers, logos or barcodes can be in black or white.

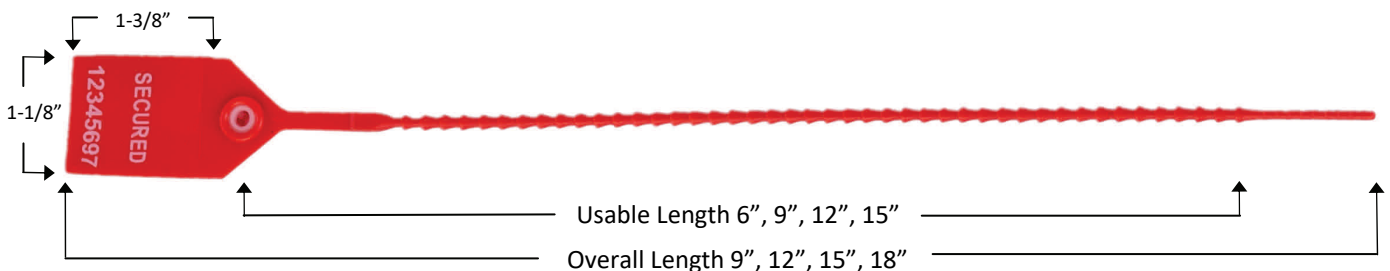

*Order by Overall Length



Dickey Manufacturing Company

X-Seal



The X-Seal is a versatile smooth ribbon pull-tight seal manufactured from Polypropylene material.

The design features rolled heat staking technology to secure the metal spring insert to the body, which provides clear evidence of tampering if forced open or cut.


The seal is available in a standard length of 35cm (13.78").

Common Applications:

- Airline & Catering Carts
- Fuel & Oil Tankers
- Chemical Drums
- ATM dispensers, Coin boxes, Cash bags
- Gaming machines & Casino carts
- Mail bags, Fire doors, Lockers, Evidence bins

Specifications:

- Materials: Polypropylene with a Spring Stainless Steel insert
- Overall Length: 35cm (13.78")
- 2mm diameter ribbon (0.079")
- 18mm x 40 mm tag (0.7" x 1.57")
- Hot stamped printing in a contrasting color
- Average Breaking Strength: 15kg (33 lbs)

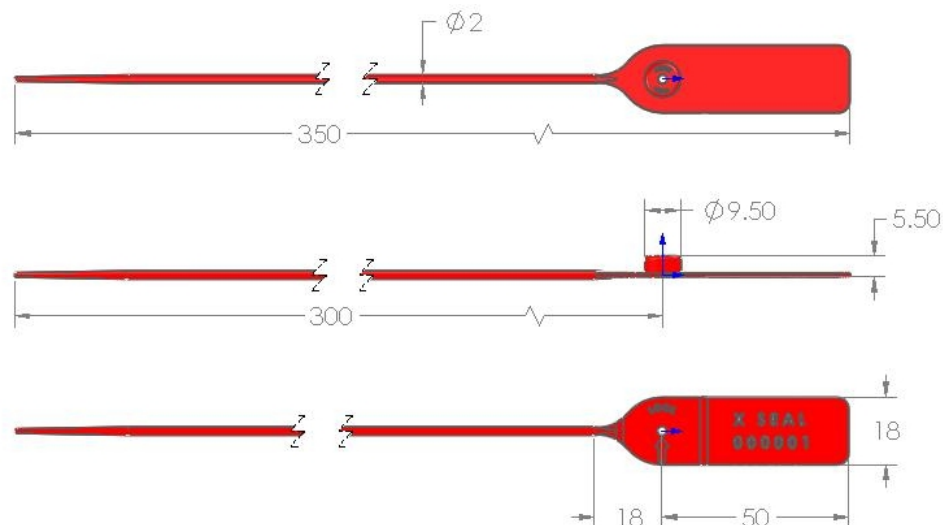



Dickey Manufacturing Company

H-Seal



The H-Seal is a versatile smooth flat ribbon pull-tight seal manufactured from Polypropylene material with a stainless steel clip insert.

The design features rolled heat staking technology to secure the metal spring insert to the body, which provides clear evidence of tampering if forced open or cut. The standard seal is manufactured with gripping spikes making the seal suitable for securing a variety of cloth or plastic bags.

Use the H-Seal where high strength is a requirement.


The seal is available in a standard length of 40 cm (15.9").

Common Applications:

- Air, Rail, & Sea Freight
- Fuel & Oil Tankers, Cargo Trailers
- Refineries
- Cash & Coin bags
- Warehouse and Security Doors
- Mail bags, Lockers, Evidence bags

Specifications:

- Materials: Polypropylene with a Spring Stainless Steel insert
- Overall Length: 40.4cm (15.9")
- 7mm wide ribbon (0.28")
- 22mm x 50mm tag (0.87" x 1.97")
- Hot stamped printing in a contrasting color
- Average Breaking Strength: 55kg (121 lbs)
- 10 per mat, 1000 per carton

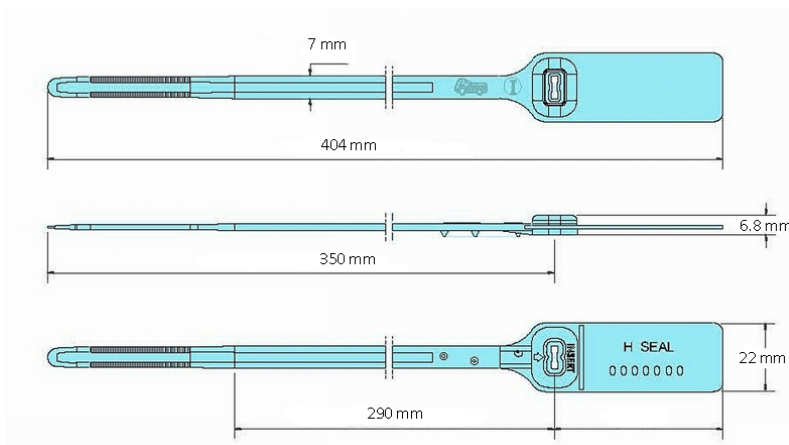



Dickey Manufacturing Company

GripTight PP Seal




The **GripTight PP Seal** is a versatile pull-tight seal manufactured from two dissimilar materials. The acetyl insert is unique in design as it incorporates two sets of locking teeth molded in one insert, unlike similar seals requiring two separate inserts. The acetyl will withstand freezing and boiling conditions, while the polypropylene body remains flexible for easy use. The design includes rolled heat staking technology to secure the insert to the body, which provides clear evidence of tampering if forced open or cut. There is also a **tear off tag** for easy removal, making this a very user friendly seal suitable for most applications.

Common Applications:

- Airline & Catering Carts
- Fuel & Oil Tankers
- Trailer & Container Doors
- Cash bags
- Gaming machines & Casino carts
- Mail bags, Fire doors, Lockers, Evidence bins

Specifications:

- Materials: Polypropylene with an acetyl insert
- Overall Length: 37cm (14.57")
- 3.9 mm diameter ribbon (0.1535")
- 26mm x 50 mm tag (1" x 1.97")
- Hot stamped printing
- Average Breaking Strength: 18kg (40 lbs)
- 10 per strip, 1000/case
- 13 lbs per box

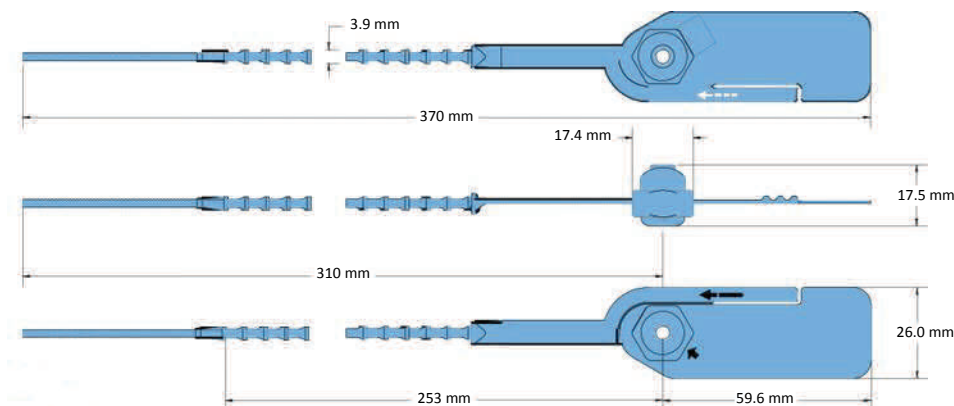



Dickey Manufacturing Company

Assure Tight Seal

Assure Tight Seals are versatile, easy to use, and are a fully adjustable plastic seal. The thin, smooth tail can fit through very small openings. The tail is secured with metal locking mechanism for an assured secure seal



APPLICATIONS

- ↗ Cabinets & Lockers
- ↗ Cash & Coin bags
- ↗ Containers
- ↗ Fiber drums
- ↗ Fire doors
- ↗ Liquid bulk trailers
- ↗ Liquor carts
- ↗ Transfer hoppers
- ↗ Valves

FEATURES

- ↗ Corrosion proof
- ↗ Enclosed metal locking mechanism
- ↗ Multi-locking positions
- ↗ No sealing tools needed
- ↗ Ultraviolet inhibitors and antioxidants added to extend life
- ↗ Stock seals available for rush shipments
- ↗ Stock seals are marked sequential numbering
- ↗ Recyclable
- ↗ Stock & Customizable available in red, blue, yellow, green, orange, & white.
- ↗ 6 ½" overall length, 4" usable

PACKAGING

- ↗ 5/strip, 100/bag, 5 bags/ master bag
- ↗ Weight per 1000: 4.3 lbs
- ↗ Weight per 5000 Case: 22 lbs


SPECIFICATIONS

- ↗ Materials: Polypropylene
- ↗ Operational length: variable
- ↗ Minimum required slot size: ~1/10"
- ↗ Numbering: to 7 digits
- ↗ Stock colors available: Yellow, red, and blue

LOCKING INSTRUCTIONS

- ↗ Pass narrow end of seal through the openings of the item to be sealed
- ↗ Insert and push the end of the seal into and through the locking barrel
- ↗ Pull remainder of the seal through until the seal fits tightly on the item that you are sealing
- ↗ Gently tug on the seal to ensure the locking mechanism are properly seated
- ↗ Record seal number as required



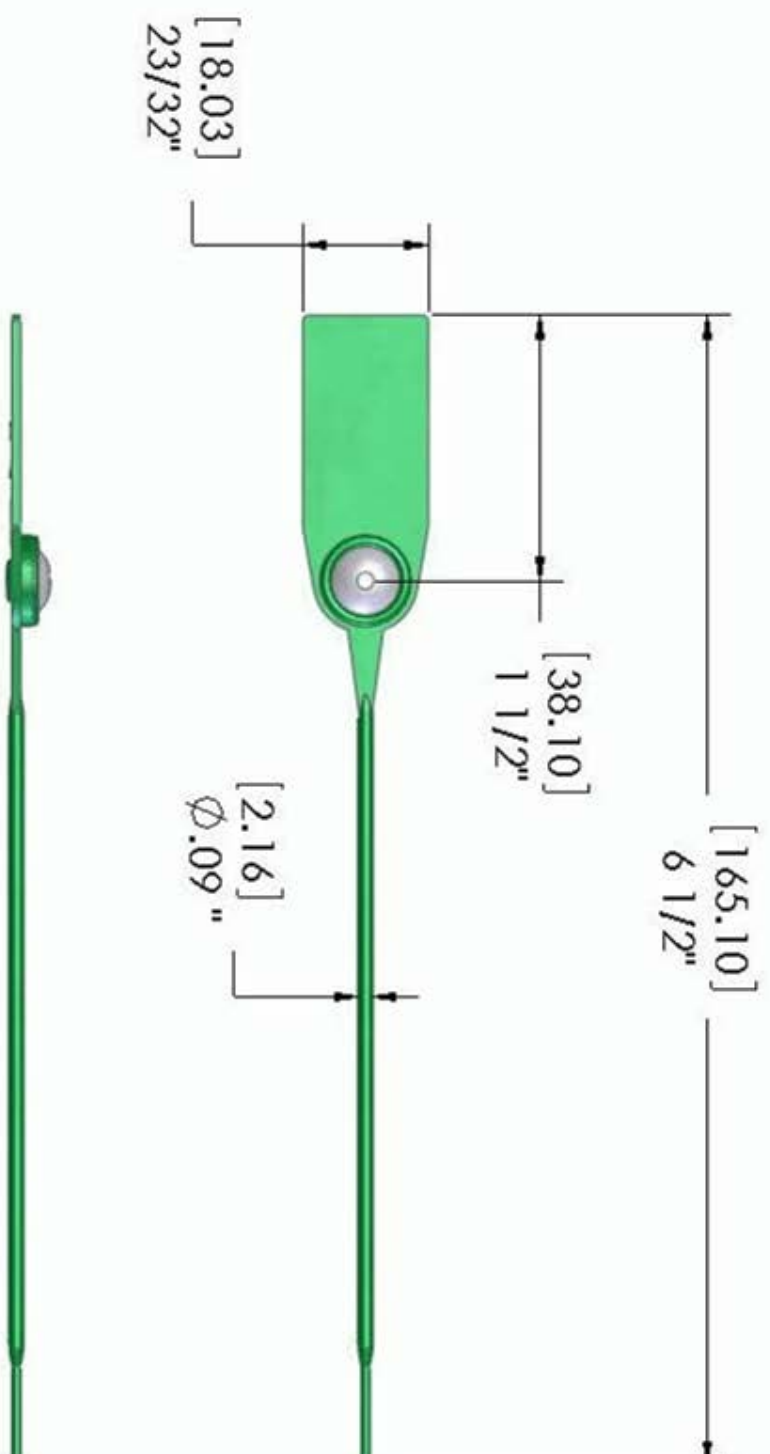

Assure Tight



Dickey Manufacturing Company

Assure Tight 23R



Assure Tight 23R Seals are versatile, easy to use, and are a fully adjustable plastic seal. The thin, smooth tail can fit through small openings. Unlike beaded or ratcheting tail seals, the Assure Tight seal can be adjusted tightly to any length. The tail is secured with a metal one direction locking mechanism for a positively secured seal.

The built in tear tab allows for easy tool-less removal.

APPLICATIONS

- ↗ Cabinets & Lockers
- ↗ Cash & Coin bags
- ↗ Containers
- ↗ Fiber drums
- ↗ Truck & Railcar doors
- ↗ Liquid bulk trailers
- ↗ Liquor carts
- ↗ Transfer hoppers
- ↗ Valves

PACKAGING

- ↗ Up to 5000 Seals per case
- ↗ Weight per 1000: 5.5 lbs

SPECIFICATIONS

- ↗ Materials: Polypropylene, metal locking mechanism
- ↗ Operational length: variable
- ↗ Minimum required slot size: ~0.1"
- ↗ Average breaking strength: 36 lbs
- ↗ Numbering: to 8 digits
- ↗ Lettered SECURED


FEATURES

- ↗ Corrosion proof
- ↗ Enclosed metal locking mechanism
- ↗ Multi-locking positions
- ↗ No sealing tools needed
- ↗ Ultraviolet inhibitors and antioxidants added to extend life
- ↗ Stock seals available for rush shipments
- ↗ Stock seals are marked with sequential numbering
- ↗ Self release tab for tool-less removal
- ↗ Stock item available in red, blue, green, yellow, & orange
- ↗ 9.3" overall length 6.3" usable

LOCKING INSTRUCTIONS

- ↗ Pass narrow end of seal through the openings of the item to be sealed
- ↗ Insert and push the end of the seal into and through the locking barrel
- ↗ Pull remainder of the seal through until the seal fits tightly on the item that you are sealing
- ↗ Gently tug on the seal to ensure the locking mechanism is properly seated
- ↗ Record seal number as required
- ↗ To remove pull the release tab downward away from flag



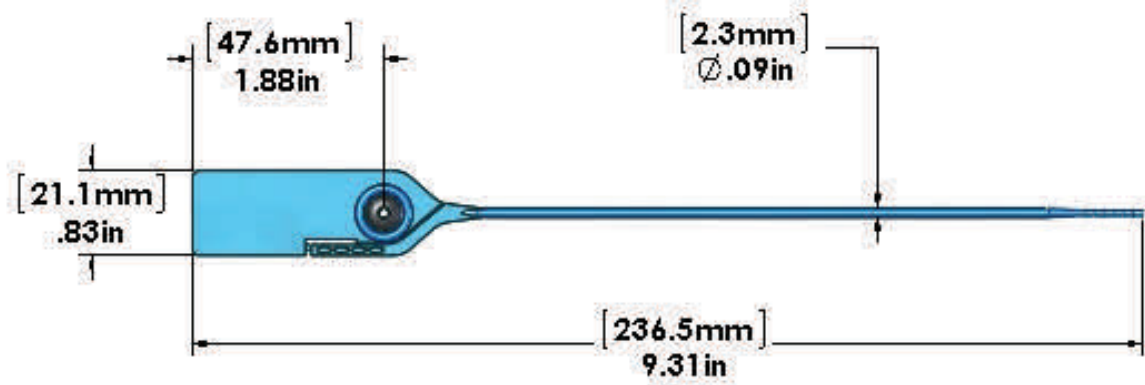



Dickey Manufacturing Company

Assure Tight 17R



APPLICATIONS

- ↗ Cabinets & Lockers
- ↗ Cash & Coin bags
- ↗ Containers
- ↗ Fiber drums
- ↗ Truck & Railcar doors
- ↗ Liquid bulk trailers
- ↗ Liquor carts
- ↗ Transfer hoppers
- ↗ Valves

PACKAGING

- ↗ Up to 5000 Seals per case
- ↗ Weight per 1000: 5 lbs

SPECIFICATIONS

- ↗ Materials: Polypropylene, metal locking mechanism
- ↗ Operational length: variable
- ↗ Minimum required slot size: ~0.1"
- ↗ Average breaking strength: 36 lbs
- ↗ Numbering: to 8 digits
- ↗ Lettered SECURED (stock)
- ↗ Custom print available

Assure Tight F I R Seals are versatile, easy to use, and are a fully adjustable plastic seal. The thin, smooth tail can fit through small openings. Unlike beaded or ratcheting tail seals, the Assure Tight seal can be adjusted tightly to any length. The tail is secured with a metal one direction locking mechanism for a positively secured seal.

The built in tear tab allows for easy tool-less removal.


FEATURES

- ↗ Corrosion proof
- ↗ Enclosed metal locking mechanism
- ↗ Multi-locking positions
- ↗ No sealing tools needed
- ↗ Ultraviolet inhibitors and antioxidants added to extend life
- ↗ Stock seals available for rush shipments
- ↗ Stock seals are marked with sequential numbering
- ↗ Self release tab for tool-less removal
- ↗ Stock item available in red, blue, green, yellow, & orange
- ↗ 6.5" overall length 4" usable

LOCKING INSTRUCTIONS

- ↗ Pass narrow end of seal through the openings of the item to be sealed
- ↗ Insert and push the end of the seal into and through the locking barrel
- ↗ Pull remainder of the seal through until the seal fits tightly on the item that you are sealing
- ↗ Gently tug on the seal to ensure the locking mechanism is properly seated
- ↗ Record seal number as required
- ↗ To remove pull the release tab downward away from flag



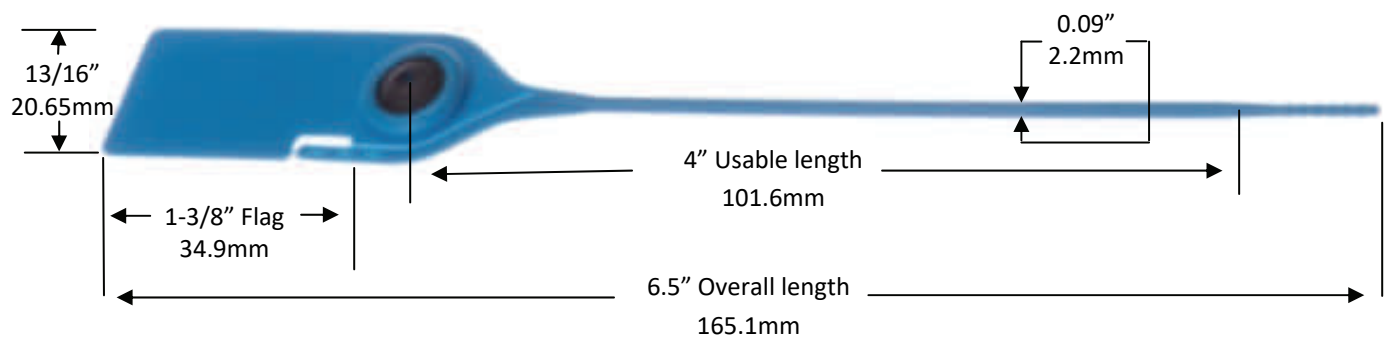



Dickey Manufacturing Company

Assure Tight 35

Assure Tight Seals are versatile, easy to use, and are a fully adjustable plastic seal. The thin, smooth tail can fit through small openings. The seals can be locked at any length, unlike beaded tail seals. The tail is secured with metal locking mechanism for an assured secure seal.



FEATURES

- ↗ Corrosion proof
- ↗ Enclosed metal locking mechanism
- ↗ Multi-locking positions
- ↗ No sealing tools needed
- ↗ Ultraviolet inhibitors and antioxidants added to extend life
- ↗ Stock seals available for rush shipments
- ↗ Stock seals are marked sequential numbering
- ↗ Recyclable
- ↗ Stock item available in red, blue, green, & yellow.
- ↗ 13 3/4" overall length

APPLICATIONS

- ↗ Cabinets
- ↗ Cash & Coin bags
- ↗ Containers
- ↗ Fiber drums
- ↗ Truck & Railcar doors
- ↗ Liquid bulk trailers
- ↗ Liquor carts
- ↗ Transfer honners

PACKAGING

- ↗ 1000 Seals per case
- ↗ Weight per 1000: 16 lbs

SPECIFICATIONS

- ↗ Materials: Polypropylene
- ↗ Operational length: variable
- ↗ Minimum required slot size: ~.2"
- ↗ Average breaking strength: 95 lbs
- ↗ Numbering: to 7 digits
- ↗ Lettered SECURED
- ↗ Stock colors available: Yellow, red, and blue

LOCKING INSTRUCTIONS

- ↗ Pass narrow end of seal through the openings of the item to be sealed
- ↗ Insert and push the end of the seal into and through the locking barrel
- ↗ Pull remainder of the seal through until the seal fits tightly on the item that you are sealing
- ↗ Gently tug on the seal to ensure the locking mechanism are properly seated
- ↗ Record seal number as required






Dickey Manufacturing Company

Assure Tight 50

Assure Tight Seals are versatile, easy to use, and are a fully adjustable plastic seal. The thin, smooth tail can fit through small openings. The seals can be locked at any length, unlike beaded tail seals. The tail is secured with metal locking mechanism for an assured secure seal

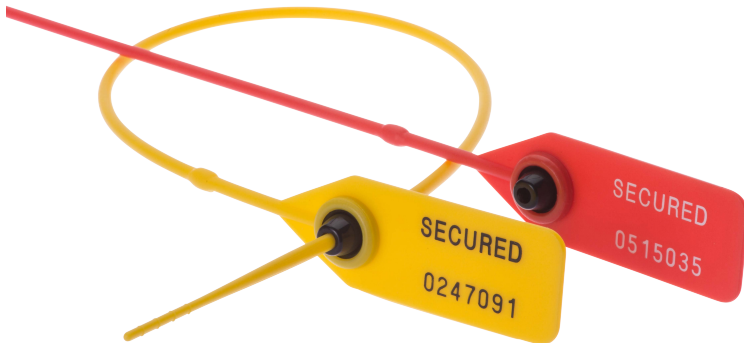

FEATURES

- ✦ Corrosion proof
- ✦ Enclosed metal locking mechanism
- ✦ Multi-locking positions
- ✦ No sealing tools needed
- ✦ Ultraviolet inhibitors and antioxidants added to extend life
- ✦ Stock seals available for rush shipments
- ✦ Stock seals are marked sequential numbering
- ✦ Recyclable
- ✦ Stock item available in red, blue, & yellow.
- ✦ 19.7" overall length

APPLICATIONS

- ✦ Cabinets
- ✦ Cash & Coin bags
- ✦ Containers
- ✦ Fiber drums
- ✦ Truck & Railcar doors
- ✦ Liquid bulk trailers
- ✦ Liquor carts
- ✦ Transfer hoppers
- ✦ Valves

PACKAGING

- ✦ 1000 Seals per case
- ✦ Weight per 1000: 16 lbs


SPECIFICATIONS

- ✦ Materials: Polypropylene
- ✦ Operational length: variable
- ✦ Minimum required slot size: ~.2"
- ✦ Numbering: to 7 digits
- ✦ Lettered SECURED
- ✦ Average breaking strength: 95 lbs
- ✦ Stock colors available: Yellow, red, and blue

LOCKING INSTRUCTIONS

- ✦ Pass narrow end of seal through the openings of the item to be sealed
- ✦ Insert and push the end of the seal into and through the locking barrel
- ✦ Pull remainder of the seal through until the seal fits tightly on the item that you are sealing
- ✦ Gently tug on the seal to ensure the locking mechanism are properly seated
- ✦ Record seal number as required



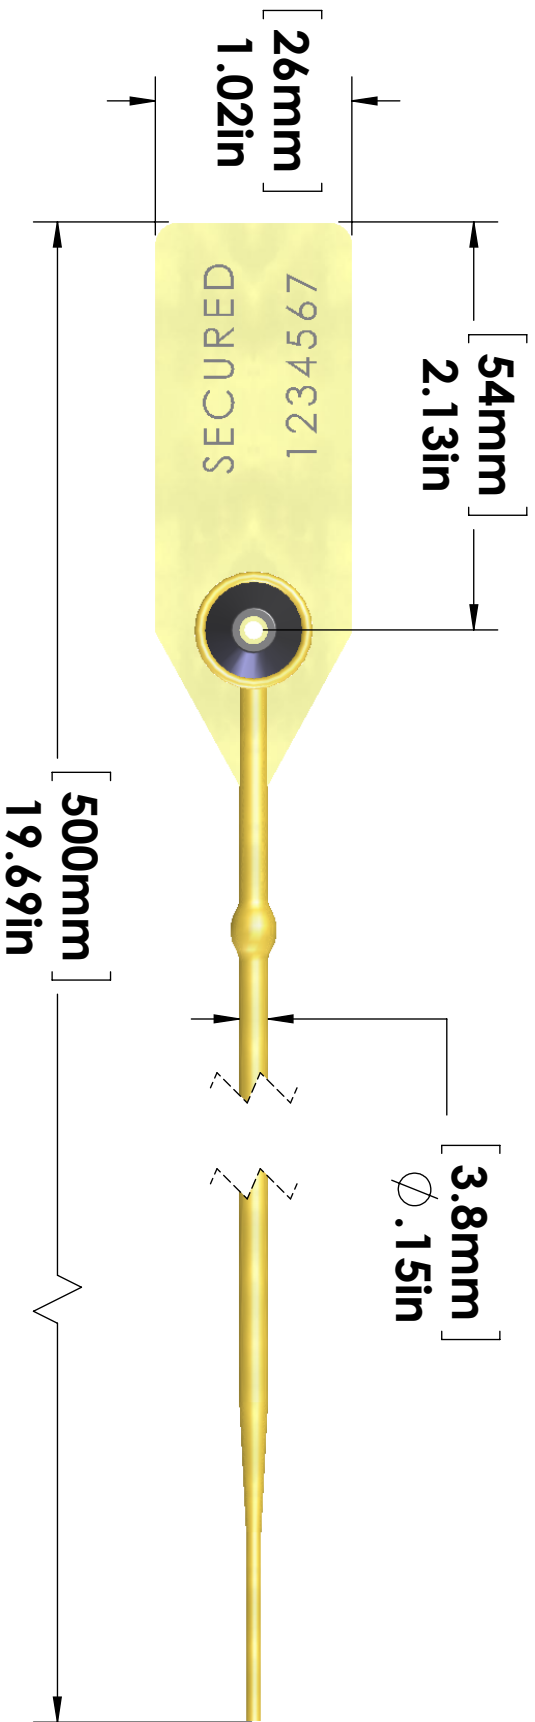

UNLESS OTHERWISE SPECIFIED

TOLERANCES

FRACTIONAL

DECIMALS

ANGULAR

XXX ±.001

XXX ±.005

XXX ±.010

XXX ±.020

XXX ±.050

XXX ±.100

XXX ±.200

XXX ±.500

XXX ±1.000

XXX ±2.000

XXX ±5.000

XXX ±10.000

DMC

DICKEY MANUFACTURING COMPANY
1315 E. MAIN STREET ST. CHARLES, IL 60174 PHONE: (630) 584-2918 FAX: (630) 584-0261

Assure Tight 50

PP Copolymer

TITLE

TREATMENT

DATE 4/15/2014

DRAWN

PLT 1:1

CHECKED

SCALE 1:1

THROAT

PILOT SIZE

PROJECTION

DWG NO 7986

QFD7.37-3
Rev 1.1 7-6-05

Created Date: Monday, September 21, 2009 7:15:55 AM

\\Server\PC\eng\Techs Work\7900\7986



Dickey Manufacturing Company

TAMPER EVIDENT TAPE



Packages sent mail or courier, electronic equipment, computers, software, and recording tapes all benefit in being guaranteed authentic, unduplicated, and complete upon delivery. Customer confidence and satisfaction is greatly increased knowing packages are delivered intact.

APPLICATIONS

- ✦ Interior or exterior applications
- ✦ Asset tracking and ID labels
- ✦ Automated teller cash cassettes
- ✦ Computer cases and software
- ✦ Safety and emission decals
- ✦ Sealing boxes
- ✦ Sterilization and testing kit seals
- ✦ Video cassettes
- ✦ Part labels
- ✦ Product seals
- ✦ Warning labels

APPLICATION INSTRUCTIONS

- ✦ Remove from roll and peel label from backing
- ✦ Apply tamper label to the device of your choice and press firmly, keeping receipt for your records
- ✦ Once applied, if an attempt is made to remove any portion of the tape, an image becomes visible making the tape void

SPECIFICATIONS

- ✦ Outer face pre-numbered
- ✦ Standard line includes VOID / OPENED message when removed
- ✦ Fade resistant ink
- ✦ Available with bar-codes and tear-off numbered receipts
- ✦ Various colors available Stock is Red
- ✦ Adhesive roll dimensions: 3 1/2" diameter X 1" wide, on a 1" core (for 500 labels)
- ✦ Label dimensions: 2 5/8" long X 1" wide, Numbered receipt dimensions: 1/4" long X 1" wide


FEATURES

- ✦ Custom adhesive formulations
- ✦ Serial numbering for control and the ability to track the item
- ✦ Used for verification of authenticity with fluorescent pigments
- ✦ Chemically treated, tinted, polyethylene film, and pressure-sensitive adhesive labels also available
- ✦ Labels include a tear-off receipt eliminating transcription errors
- ✦ Easy to handle
- ✦ Universal application
- ✦ Inexpensive
- ✦ Aggressive, instant ready adhesive

PACKAGING

- ✦ 100 labels per roll (stock)
- ✦ Varies with quantity ordered



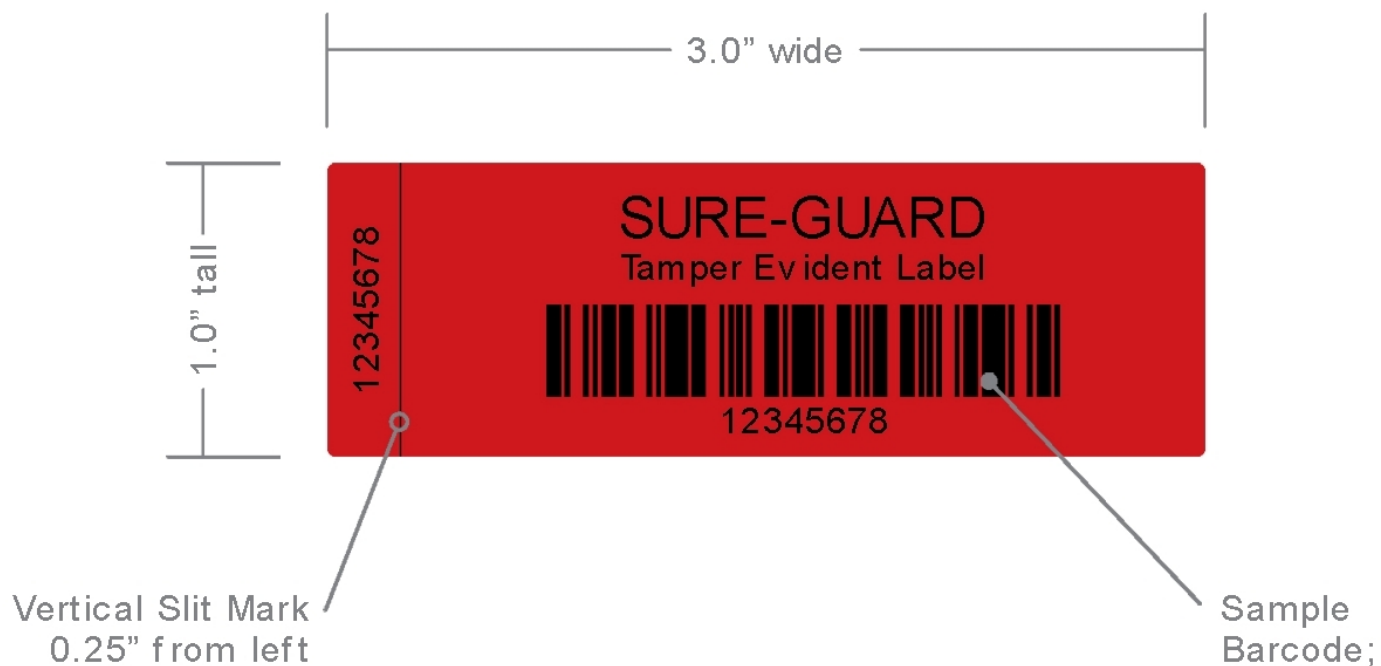

Tamper Evident Tape



Dickey Manufacturing Company

SECURE T.R.A.C TAPE



SECURE T.R.A.C Tape when applied to cardboard surfaces leaves noticeable residue and causes fiber tear of the cardboard when removed. Traceability is achieved through the use of serial numbers occurring every nine inches throughout the roll. Easily identified evidence if a tamper attempt is made makes the SECURE T.R.A.C. an effective pilferage deterrent. Increase customer satisfaction with guaranteed complete packaging.

APPLICATIONS

- ✦ Interior or exterior applications
- ✦ Asset tracking and ID labels
- ✦ Automated teller cash cassettes
- ✦ Safety and emission decals
- ✦ Sealing cardboard boxes
- ✦ Sterilization and testing kit seals
- ✦ Part labels
- ✦ Product seals
- ✦ Warning labels

PACKAGING

- ✦ 180 ft or 250 ft per roll.
- ✦ Varies with quantity ordered

SPECIFICATIONS

- ✦ Standard residue line includes OPENED
- ✦ Fade resistant ink
- ✦ Multi layer release
- ✦ Stocked in 2" wide rolls
- ✦ 250 ft per roll yields approximately 330 – 9" numbered sections
- ✦ 180 ft per roll yields approximately 240 – 9" numbered sections

FEATURES

- ✦ Available in custom colors
- ✦ Tamper evident
- ✦ Serial numbering for control and the ability to track the application
- ✦ Custom message – OPENED appears if removed
- ✦ Easy to handle
- ✦ Universal application
- ✦ Cost effective
- ✦ Fits on standard tape gun

APPLICATION INSTRUCTIONS

- ✦ Remove tape from roll or backing and apply to a clean surface
- ✦ Apply tamper label to the device of your choice and press firmly
- ✦ Record seal number as required
- ✦ Once applied, if an attempt is made to remove any portion of the tape, an image becomes visible making the tape void





Dickey Manufacturing Company

Glad-hand Locks

APPLICATIONS

- Any standard glad-hand union



The Gladhand lock prevents unauthorized or unintentional movement of a truck trailer by sealing the air intake valve of the trailer's emergency brake system.

A Gladhand lock is a clear choice as a safety device. Serving as an excellent reminder for drivers to check for completion of loading/unloading or mechanical service before moving the trailer.

The use of a Gladhand lock offers an increased level of theft deterrence.

Maximum security can be achieved when used in combination with the DMC High Security TRAILOK™ Kingpin lock and High Security Abloy® padlocks.

Stocked locks are keyed alike, individually keyed locks are available.

Individual keying is per order, lock codes are re-used.

Gladhand locks are offered as a safety device and are intended as a low level security lock.



FEATURES

- Metal or Plastic styles available
- Keyed alike or individually
- Easy application
- Prevent accidental trailer movement





Dickey Manufacturing Company


Trailer Security & Safety



DMC trailer locks offer security levels ranging from safety, theft deterrent, to the strongest high security levels.

The use of glad-hand locks can be used as a simple to use safety device or as a supplement to kingpin locks.

High security *Abloy* padlocks are also available. Padlocks can be keyed to match the TRAILOK High Security Kingpin Lock.





Dickey Manufacturing Company

TRAILOK, TRAILOK II, & the Economy Lock

- APPLICATIONS**
- ↪ Any standard kingpin equipped trailer



TRAILOK:

The DMC High Security Kingpin Lock offers the ultimate in trailer theft prevention.

The TRAILOK combines the overall toughness of ADI (Austempered Ductile Iron) with the flame cutting resistance of aluminum. This combination of materials offers superior protection compared to devices manufactured from single base materials.

The “dead bolt” style locking mechanism is controlled by a high security ABLOY® lockset. The ABLOY® system offers maximum key security with restricted, patented key profiles. The locking cylinder contains no springs or pins which could malfunction in the presence of dirt, moisture, poor weather conditions, corrosion or freezing. A unique rotating detainer disk system makes the ABLOY® cylinder virtually pick proof.

For additional security and convenience, the locks can be individually keyed, keyed alike, master-keyed or grand-master-keyed.

DMC offers a wide variety of ABLOY® high security padlocks which can be incorporated into the same keying system as the TRAILOK

TRAILOK II:

Unique clam-shell design utilizes a standard Master or Abloy padlock to secure the all aluminum body. The cone shape and solid design offer a high level of security at an economical price.

ECONOMY LOCK:

The economy lock offers basic protection for trailers and will detour trailer theft. Closed end retains and helps prevent the spread of fifth-wheel grease.





Dickey Manufacturing Company

The DMC Economy Kingpin Lock



The economy kingpin lock offers a closed bottom design for added grease control and easy in easy installation. The closed design keeps the grease contained within the lock and off of the installer.

The economy lock is installed using only the key, no installation tools are required.

Significantly increases the security of a parked trailer through the use of the DMC Economy Kingpin lock.

For added security use in conjunction with other security devices or for the ultimate kingpin security lock use the Trailok High Security Lock.


APPLICATIONS:

- Trailer sitting in high traffic parking lots
- Travel trailers parked at home, on the road, or in a campground
- Use during loading or unloading to prevent unintentional movement
- Use during service or maintenance
- Anywhere a trailer sits unattended

SPECIFICATIONS:

- Ductile iron casting
- 5/8" locking bolt
- Floating lock cylinder
- Removable lock cylinder for easy cleaning
- Can be keyed alike



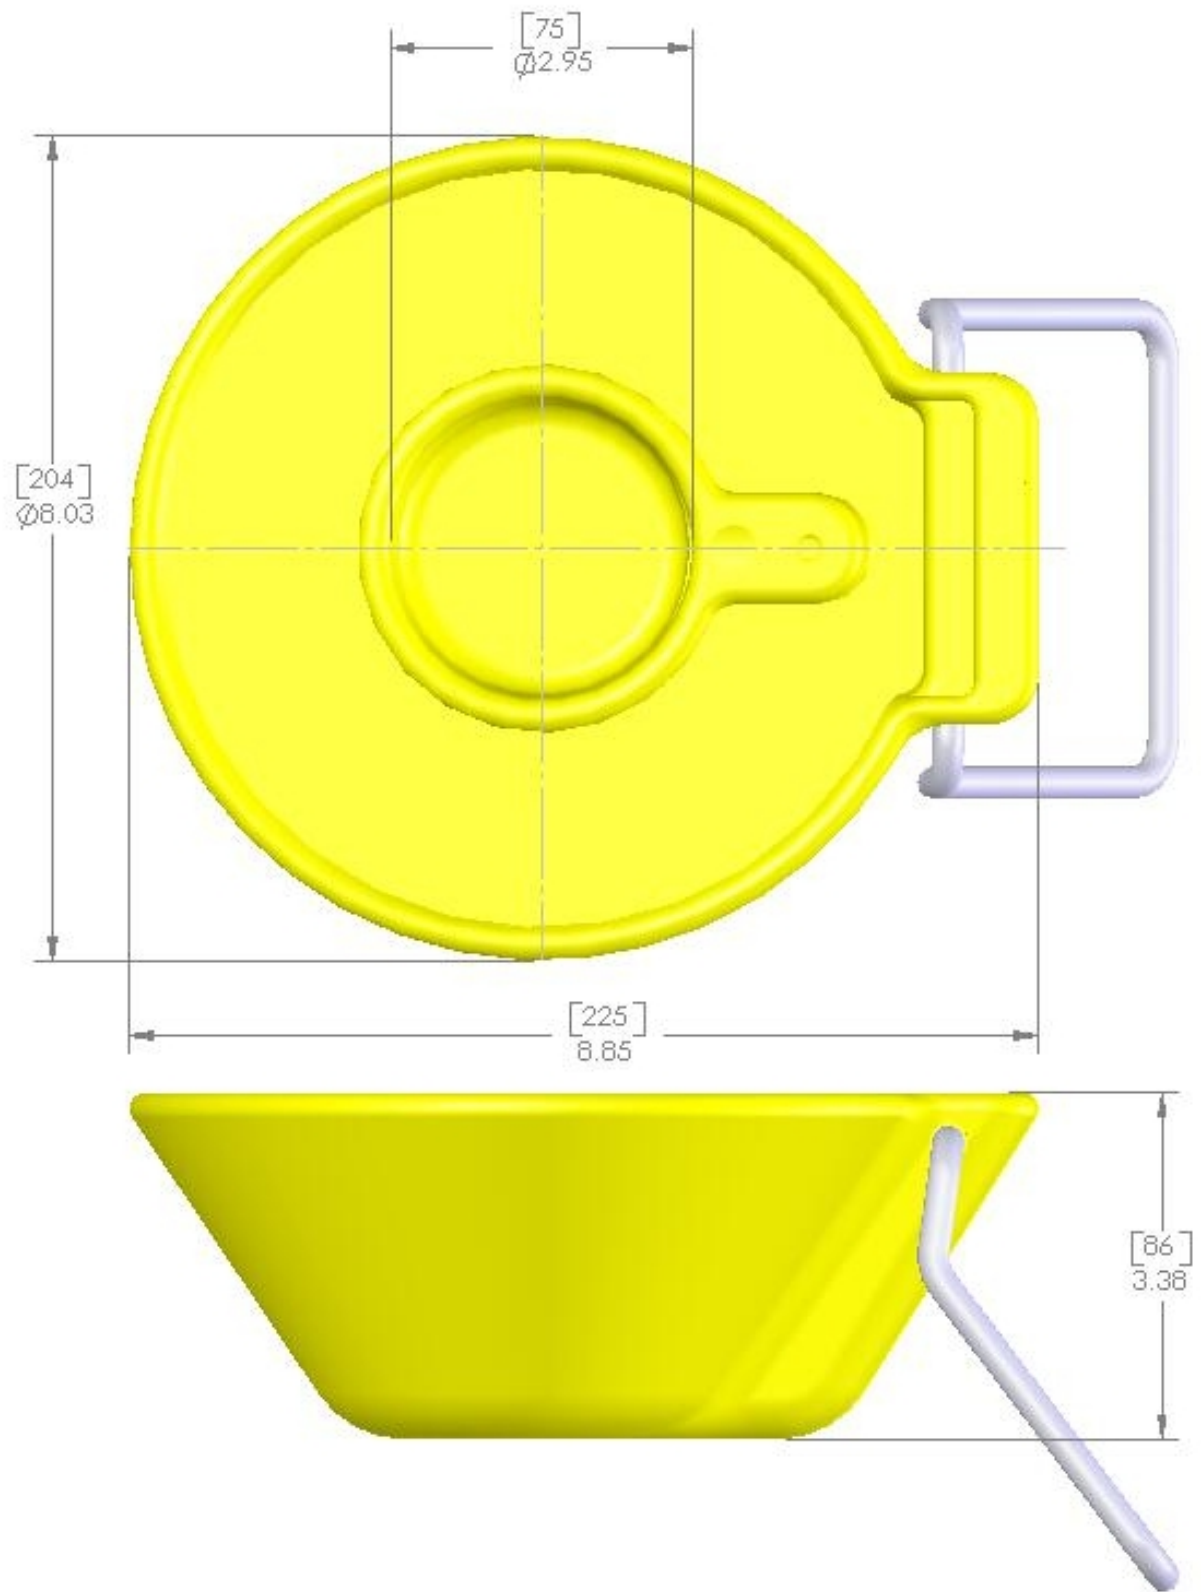

TRAILOK



Dickey Manufacturing Company

The DMC Economy Kingpin Lock



The economy kingpin lock offers a closed bottom design for added grease control and easy in easy installation. The closed design keeps the grease contained within the lock and off of the installer.

The economy lock is installed using only the key, no installation tools are required.

Significantly increases the security of a parked trailer through the use of the DMC Economy Kingpin lock.

For added security use in conjunction with other security devices or for the ultimate kingpin security lock use the Trailok High Security Lock.

APPLICATIONS:


- Trailer sitting in high traffic parking lots
- Travel trailers parked at home, on the road, or in a campground
- Use during loading or unloading to prevent unintentional movement
- Use during service or maintenance
- Anywhere a trailer sits unattended

SPECIFICATIONS:

- Ductile iron casting
- 5/8" locking bolt
- Floating lock cylinder
- Removable lock cylinder for easy cleaning
- Can be keyed alike



Container Bar Seal

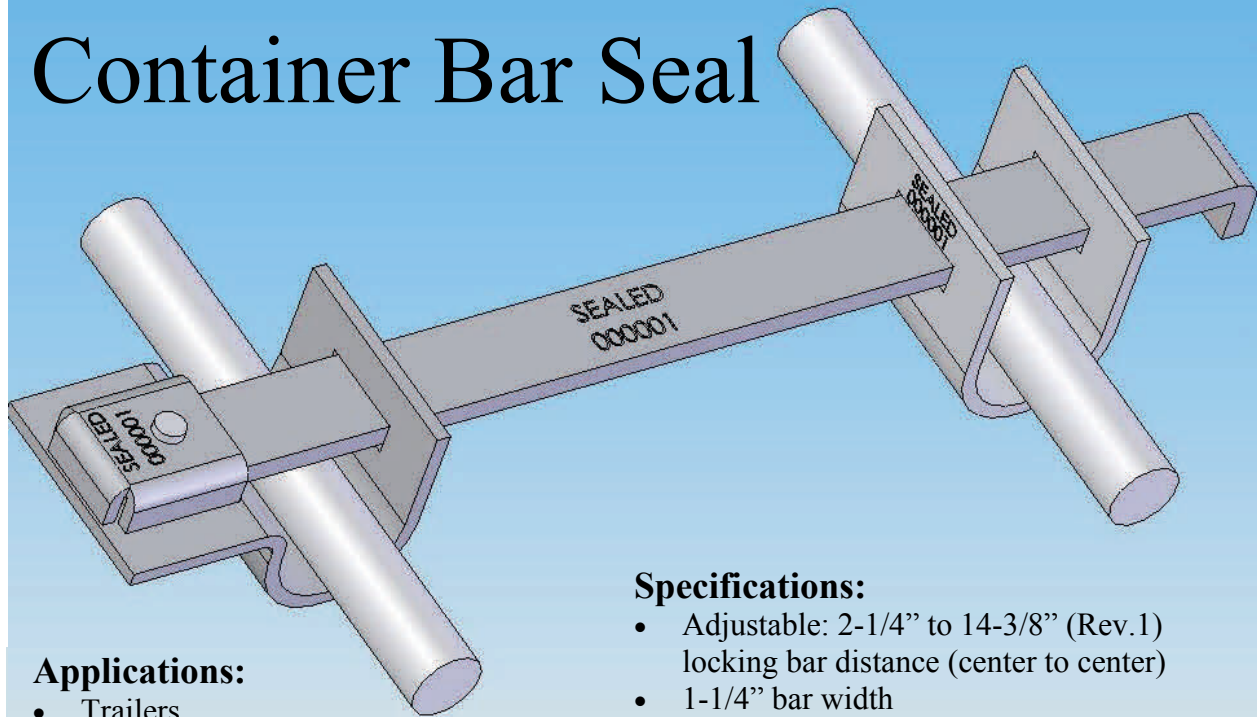

Applications:

- Trailers
- Inter-modal containers
- Dual swing doors utilizing locking rods

Features:

- **Hardened** steel construction
- Can not be cut with a hacksaw
- No weld lines
- Painted finish
- Laser identification
- Each piece numerically matched to prevent component replacement
- Economical
- High Strength & High Security
- One time use
- Easy installation
- Adjustable length
- Unique serial numbers


Specifications:

- Adjustable: 2-1/4" to 14-3/8" (Rev.1) locking bar distance (center to center)
- 1-1/4" bar width
- 5/16" thick main bar
- Seamless 3/16" thick rod cups
- Main Bar Shear Strength >16,000 lbs

Installation / Removal:

- Slide U-bracket around right-side inner locking rod
- Insert main bar through slots in installed U-bracket, Slide through slots right to left **with bend in main bar facing container**
- Slide locking U-bracket around left inner locking rod
- Slide main bar through slots in the locking U-bracket
- Align holes in locking U-bracket and main bar
- Insert locking bolt to securely affix the locking bar - check for proper locking
- Record bar number on shipping documents
- To remove: Inspect seal for tampering and matching serial numbers before removal. While wearing proper safety equipment, cut the bar at the shown location with an abrasive cut-off /grinding wheel.

Cutting point





Dickey Manufacturing Company
Presents
The Rapid Ship Program

For immediate security seal needs, DMC developed a high speed shipping program to meet our customers emergency, priority, or time sensitive sealing requirements.

Stock items are available for same day shipping on orders* received by 2:00PM** Central Standard Time.

*Quantities may be limited

**Shipping cut-off time may be extended for expedited air shipments.

